

PIL P44 ULTRASONIC SENSOR ANALOG AND TRANSISTOR OUTPUT

P44-160-M30-UI2PCM

Ultrasonic sensor, M30, 1,6m, 0-10V, 4-20mA, 2xPNP, connector





- Sensing distance 60-3500 mm
- Output 0-10 V + 4-20 mA + 2 PNP NO/NC
- M12 connector
- Teach button

PRODUCT DESCRIPTION




SPECIFICATIONS

Distance Max	1600
Distance Min	80
Exit	4-20mA, 0-10V, 2xPNP
House	M30
IP Class	IP67
LED Display	Yes
Operating Frequency	1
Supply Voltage DC Max	30
Supply Voltage DC Min	15
Temperature range from	-15
Temperature range to	70

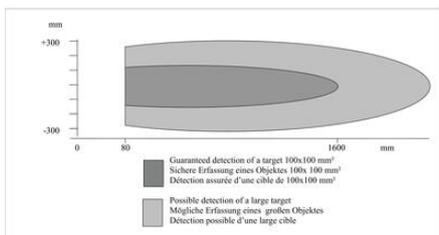

Key/Taster
P1 LED SP1 0 V
P2 LED SP2 10 V
Echo LED Echo

Wiring
Pin Function
1 24 Vdc
3 0 V GND
2 SP2
4 SP1
5 0 - 10 V
4 - 20mA

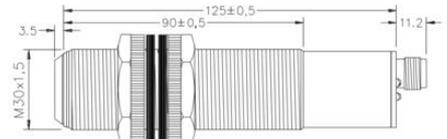

Key/Taster
P1 LED SP1 0 V
P2 LED SP2 10 V
Echo LED Echo

Wiring
Pin Function
1 24 Vdc
3 0 V GND
2 SP2
4 SP1
5 0 - 10 V
4 - 20mA

