DEFINOX - PRESSURE RELIEF VALVE

DE-TU038B14190
Pressure relief valve, Adjustable, 1½", EPDM, 0-3.5bar

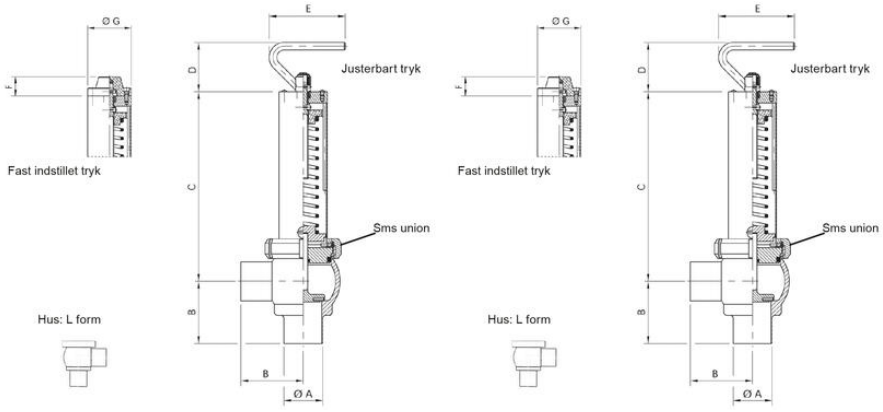


- Safety valve with adjustable or fixed pressure 0-12 Bar
- Gaskets in FKM - EPDM
- 3.1 EN10204 Certificates by order
- Other connections, e.g. clamp, flanger mm.
- Standard with L-body in Aisi 316l / 1.4404

PRODUCT DESCRIPTION

SPECIFICATIONS

Certificate	3.1 EN10204
Connection	Weld ends
Description	Adjustable valve
Design norm	SMS
House	L-body
Housing	EPDM
Internal Diameter	35.6
Material quality	1.4404
Outer Diameter	38
Pressure Range Max	3.5
Pressure Range Min	0
Surface Finish	RA<0,8/1,2µm
Temperature range	0°C/+120°C
Weight	4.5
Working Pressure Max	3.5
Working Pressure Min	0


Ø G
F
Fast indstillet tryk
Hus: L form
E
D
C
B
Justerbart tryk
Sms union
Ø A
Ø G
F
Fast indstillet tryk
Hus: L form
E
D
C
B
Justerbart tryk
Sms union
Ø A