
DEFINOX - CHECK VALVE WITH CLAMP ENDS

DE-UU012A11100-R55
Check valve, ½", PFA/EPDM

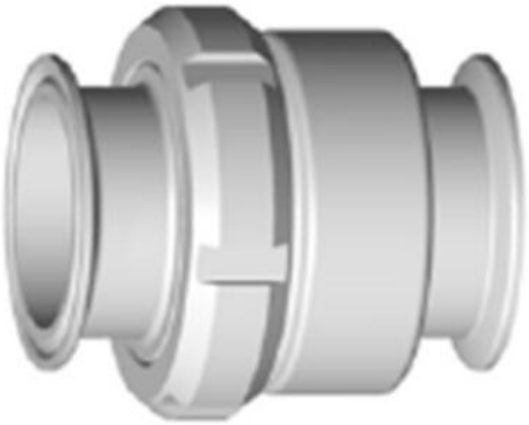

- Designed for a minimal pressure drop
- Vertical mounting for an improved seal
- Quick and easy installation
- Connection: Clamp
- Sealing types: PFA - FKM - EPDM - PTFE

PRODUCT DESCRIPTION

Our products are of high quality and design that meet the strongest requirements of process technology and are the ideal solution for Food, Brewery, Cosmetics and Pharmaceutical processes!

Tehcnical Advantages:
· 1/2 "'- DN 125
· Interior surface roughness Ra = 0.8 µm
· Vertical mounting for an improved seal and eliminate retention
· Fast and easy disassembly
· Connection: Welding ends
· Multiple packing types: PFA - FKM - EPDM.
· Approvals .: 3A - ATEX - DESP - 3.1 - 2.1 - E1935 / 2004 - CE - REACH - ANIA

SPECIFICATIONS

Certificate	3.1 EN10204
Connection	Clamp ends
Design norm	SMS
Exit	90 Mbar
Flange size	Ø25.4mm
Housing	PFA/EPDM
Internal Diameter	9.4
Material quality	1.4404
Outer Diameter	12.7
Surface Finish	RA<0,8/1,2µm
Temperature range from	0
Temperature range to	120
Weight	0.3

Working Pressure Max	10