

DEFINOX - DCX 3 & DCX 4 MINI

Manual & Pneumatic

DE-NU012A15100

DCX3 mini, 1/2" L-body, NC pneumatic, SS/FKM

- High packing pressure
- Independent and compact body
- Many configuration options
- Possible use on a wide range of applications



Product description

Definox Mini Seat Valves.

This seat valve design offers a wide range of options and variants.


Technical advantages:

- From 1/2" to 1"
- Fitted with PEEK plug as standard - inert to chemical products
- Welded or Clamp ends possible
- Ergonomic handle with visual opening indicator
- Elastomer seal available for charged products
- High packing pressure
- Self-contained and compact body with a wide range of configuration options:
- Possible use on a wide range of applications
- Easy and fast maintenance thanks to the clamp assembly

Specifications

| | |
|-------------------------------|-----------------------------|
| Certificate | 3.1 EN10204 |
| Connection | Weld ends |
| Description | STEEL PLUG |
| House | L Body |
| Housing | FKM |
| Internal Diameter | 9.4 |
| Material quality | 1.4404 |
| Outer Diameter | 12.7 |
| Surface Finish | Indv.: RA 0,8µm Udv.: 1,2µm |
| Temperature range from | -5 |

| | |
|----------------------|-----|
| Temperature range to | 140 |
| Weight | 1.5 |
| Working Pressure Max | 18 |

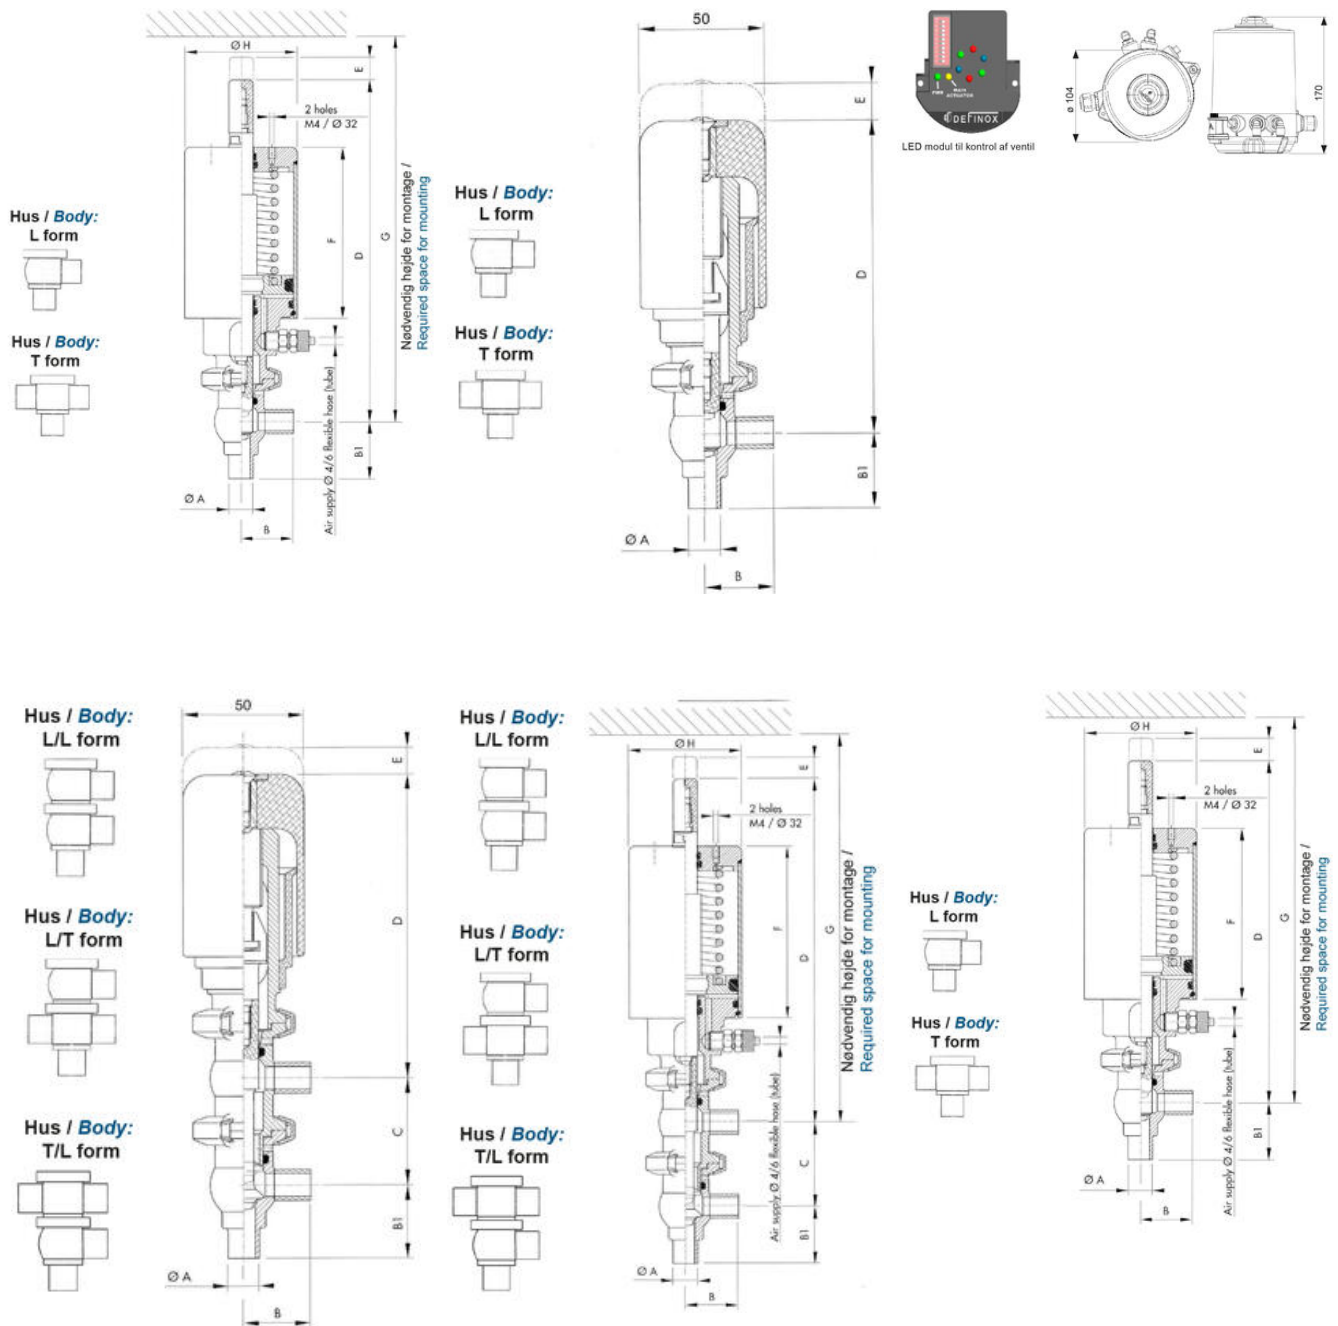

Hus / Body:
L form

Hus / Body:
T form



Hus / Body:
L/L form

Hus / Body:
L/T form

Hus / Body:
T/L form



Hus / Body:
L/L form

Hus / Body:
L/T form

Hus / Body:
T/L form

