


## DEFINOX - DCX 3 & DCX 4 MINI

### Manual & Pneumatic

DE-MU012F32100

DCX4 mini, 1/2" L-T-body, Manual, PEEK/FKM

- High packing pressure
- Independent and compact body
- Many configuration options
- Possible use on a wide range of applications

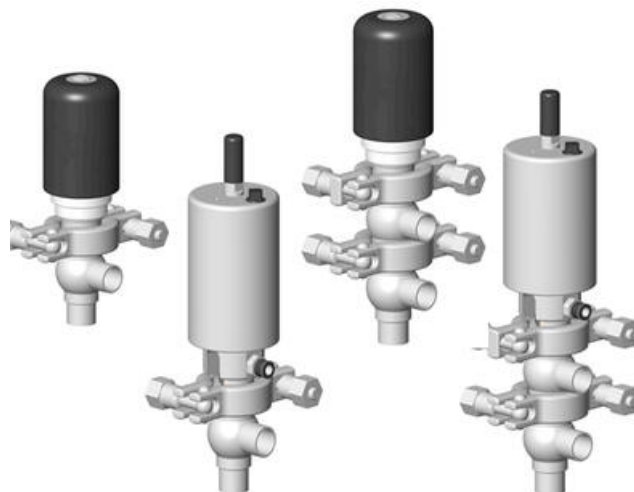

#### Product description

Definox Mini Seat Valves.

This seat valve design offers a wide range of options and variants.

Technical advantages:

- From 1/2" to 1"
- Fitted with PEEK plug as standard - inert to chemical products
- Welded or Clamp ends possible
- Ergonomic handle with visual opening indicator
- Elastomer seal available for charged products
- High packing pressure
- Self-contained and compact body with a wide range of configuration options:
- Possible use on a wide range of applications
- Easy and fast maintenance thanks to the clamp assembly


#### Specifications

|                               |                             |
|-------------------------------|-----------------------------|
| <b>Certificate</b>            | 3.1 EN10204                 |
| <b>Connection</b>             | Weld ends                   |
| <b>Description</b>            | PEEK PLUG                   |
| <b>House</b>                  | L+T Body                    |
| <b>Housing</b>                | FKM                         |
| <b>Internal Diameter</b>      | 9.4                         |
| <b>Material quality</b>       | 1.4404                      |
| <b>Outer Diameter</b>         | 12.7                        |
| <b>Surface Finish</b>         | Indv.: RA 0,8µm Udv.: 1,2µm |
| <b>Temperature range from</b> | -5                          |

Temperature range to 140




Weight 0.7

Working Pressure Max 18

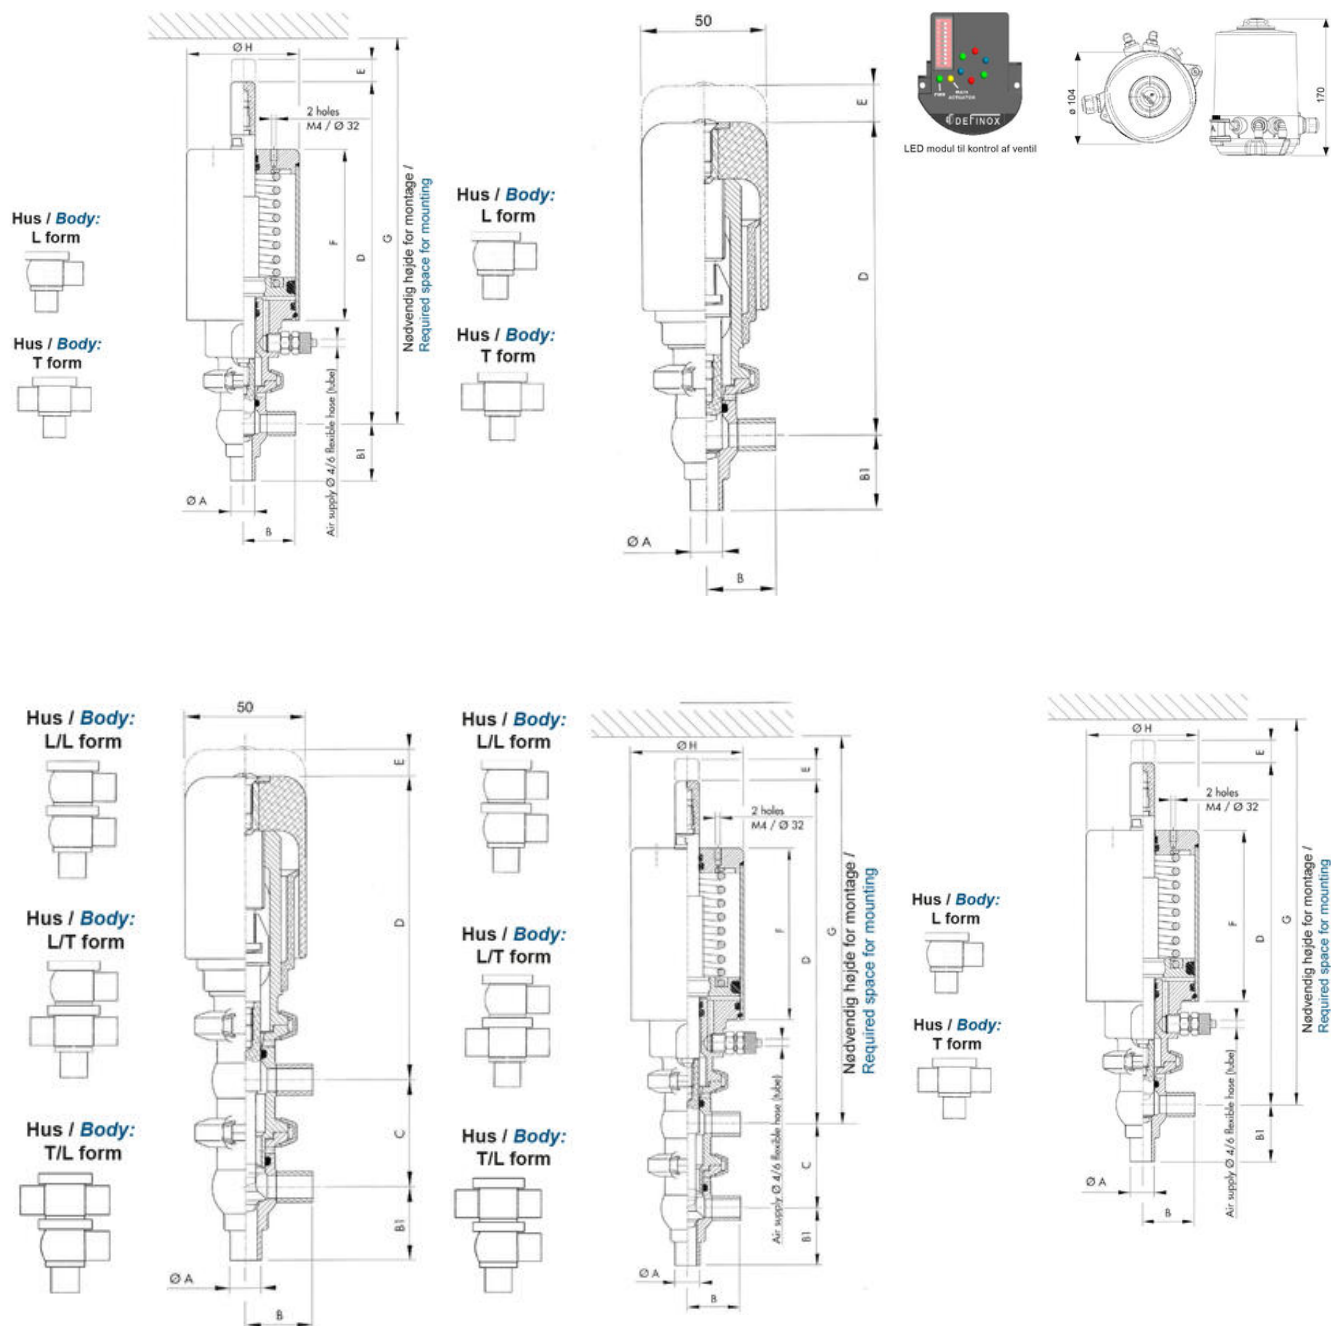

Hus / Body:  
L form


Hus / Body:  
T form

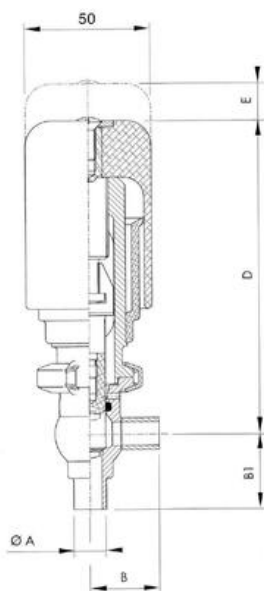

Hus / Body:  
L/L form

Hus / Body:  
L/T form

Hus / Body:  
T/L form

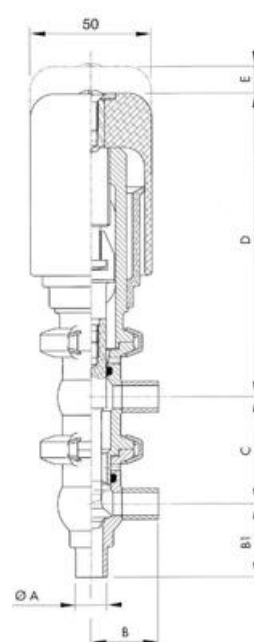

Hus / Body:  
L/L form

Hus / Body:  
L/T form

Hus / Body:  
T/L form

