


DEFINOX - DCX 3 & DCX 4 MINI

Manual & Pneumatic

DE-MU019A17100

DCX4 mini, 3/4" L-L-body, NC pneumatic, SS/PFA/FKM

- High packing pressure
- Independent and compact body
- Many configuration options
- Possible use on a wide range of applications

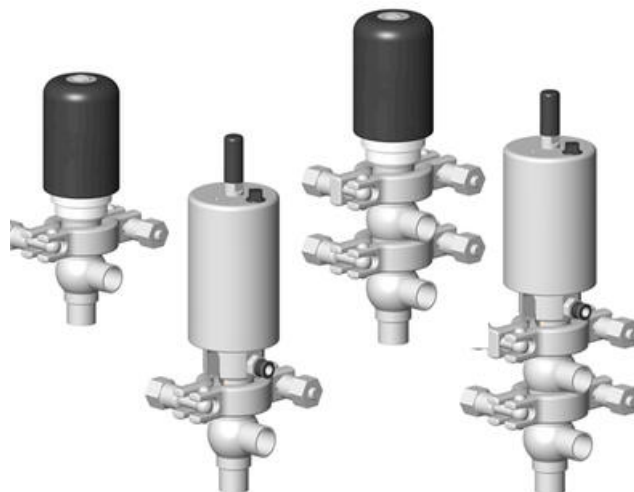

Product description

Definox Mini Seat Valves.

This seat valve design offers a wide range of options and variants.

Technical advantages:

- From 1/2" to 1"
- Fitted with PEEK plug as standard - inert to chemical products
- Welded or Clamp ends possible
- Ergonomic handle with visual opening indicator
- Elastomer seal available for charged products
- High packing pressure
- Self-contained and compact body with a wide range of configuration options:
- Possible use on a wide range of applications
- Easy and fast maintenance thanks to the clamp assembly


Specifications

Certificate	3.1 EN10204
Connection	Weld ends
Description	STEEL PLUG
House	L+L Body
Housing	PFA/FKM
Internal Diameter	15.75
Material quality	1.4404
Outer Diameter	19.05
Surface Finish	Indv.: RA 0,8µm Udv.: 1,2µm
Temperature range from	-5

Temperature range to 140




Weight 1.7

Working Pressure Max 18

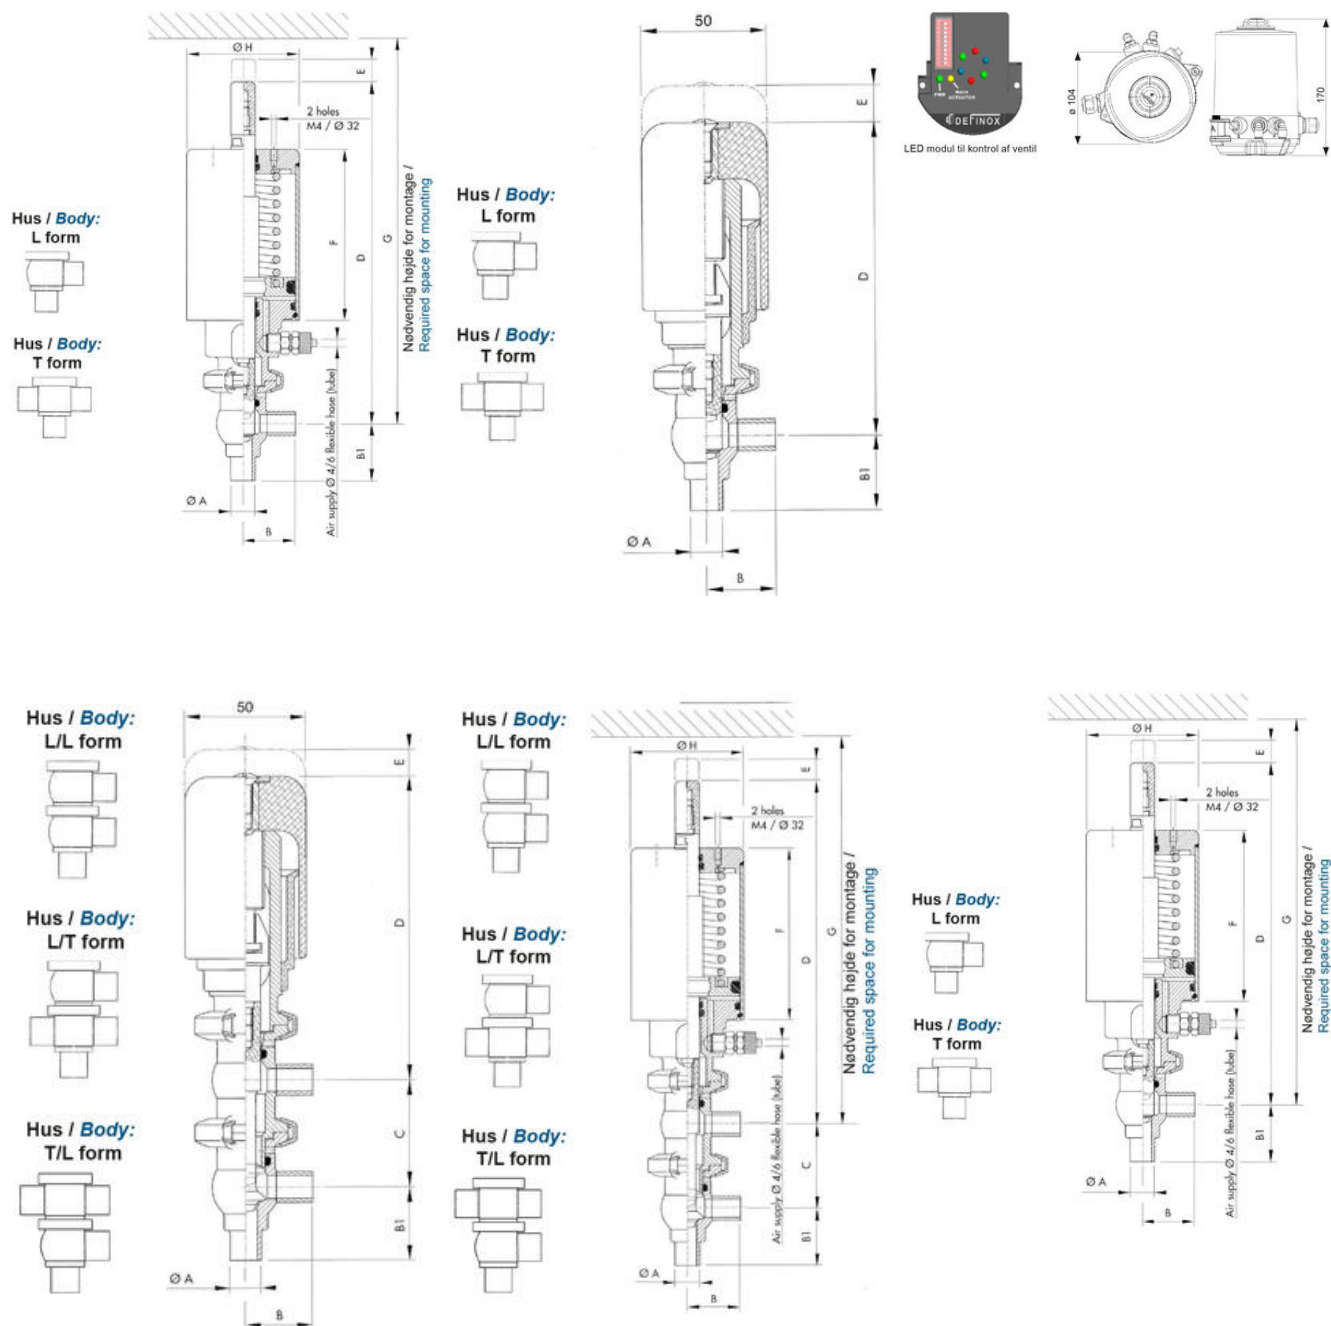

Hus / Body:
L form


Hus / Body:
T form

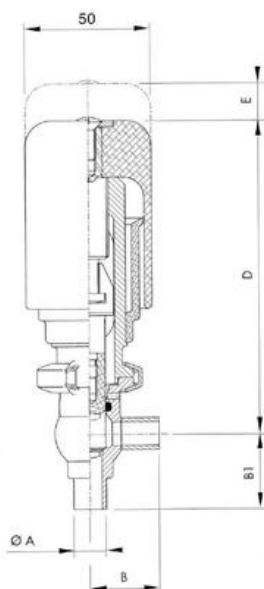

Hus / Body:
L/L form

Hus / Body:
L/T form

Hus / Body:
T/L form

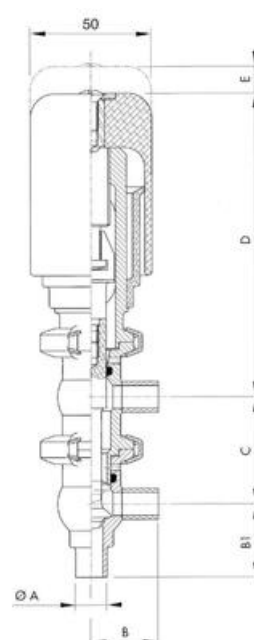

Hus / Body:
L/L form

Hus / Body:
L/T form

Hus / Body:
T/L form

