


DEFINOX - PRESSURE RELIEF VALVE

DE-TU051B14192

Pressure relief valve, Adjustable, 2", EPDM, 7.5-12bar


- Safety valve with adjustable or fixed pressure 0-12 Bar
- Gaskets in FKM - EPDM
- 3.1 EN10204 Certificates by order
- Other connections, e.g. clamp, flanger mm.
- Standard with L-body in Aisi 316l / 1.4404

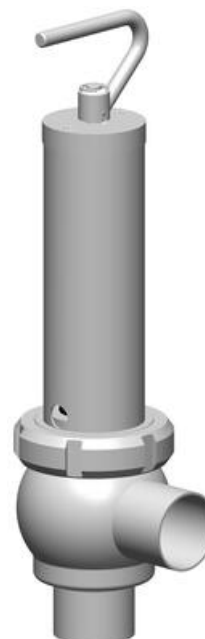



Product description

Specifications

Certificate	3.1 EN10204
Connection	Weld ends
Description	Adjustable valve
Design norm	SMS
House	L-body
Housing	EPDM
Internal Diameter	48.5
Material quality	1.4404
Outer Diameter	51
Pressure Range Max	12
Pressure Range Min	7.5
Surface Finish	RA<0,8/1,2µm
Temperature range	0°C/+120°C
Weight	4.5



Hus: L form

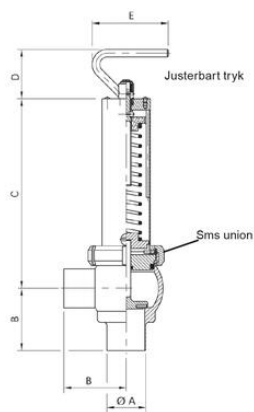

Hus: L form

