
DEFINOX - DCX 3 & DCX 4 MINI

Manual & Pneumatic

DE-NU012F11100
DCX3 mini, ½" L-body, Manual, PEEK/EPDM

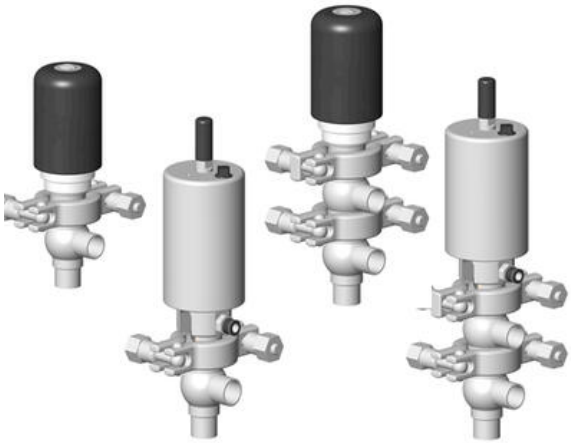

- High packing pressure
- Independent and compact body
- Many configuration options
- Possible use on a wide range of applications


PRODUCT DESCRIPTION


Definox Mini Seat Valves.
This seat valve design offers a wide range of options and variants.
Technical advantages:
· From 1/2" to 1"
· Fitted with PEEK plug as standard - inert to chemical products
· Welded or Clamp ends possible
· Ergonomic handle with visual opening indicator
· Elastomer seal avaliable for charged products
· High packing pressure
· Self-contained and compact body with a wide range of configuration options:
· Possible use on a wide range of applications
· Easy and fast maintenance thanks to the clamp assembly

SPECIFICATIONS

Certificate	3.1 EN10204
Connection	Weld ends
Description	PEEK PLUG
House	L Body
Housing	EPDM
Internal Diameter	9.4
Material quality	1.4404
Outer Diameter	12.7
Surface Finish	Indv.: RA 0,8µm Udv.: 1,2µm
Temperature range from	-5
Temperature range to	140
Weight	0.6

Working Pressure Max	18

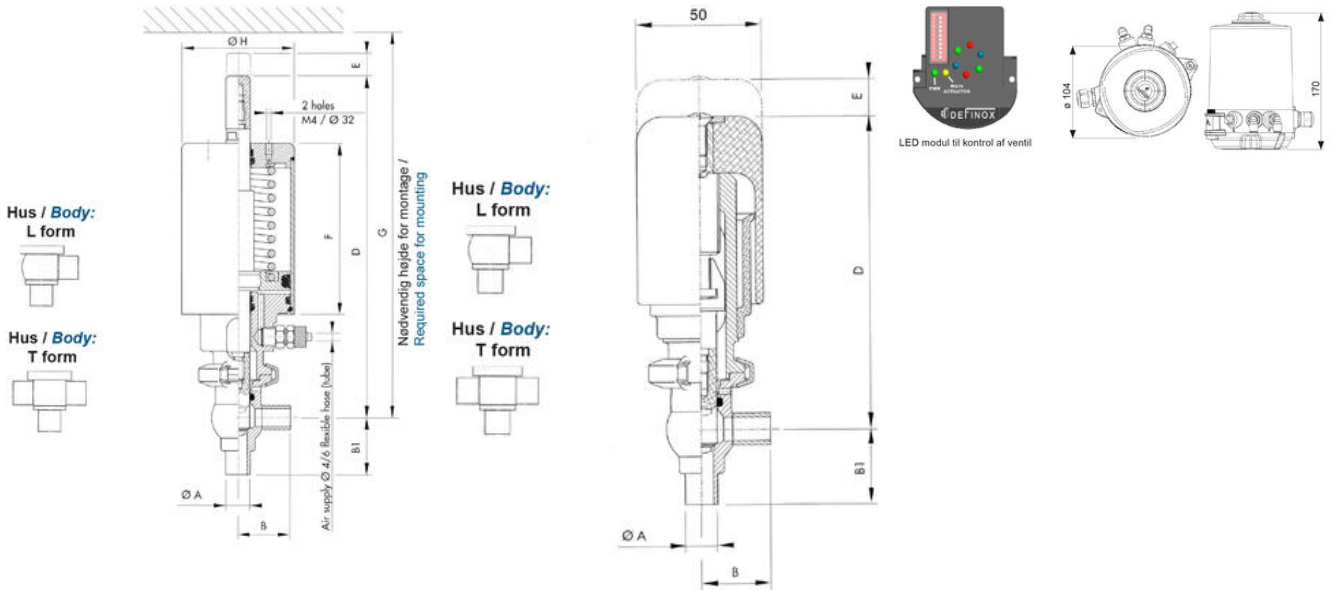

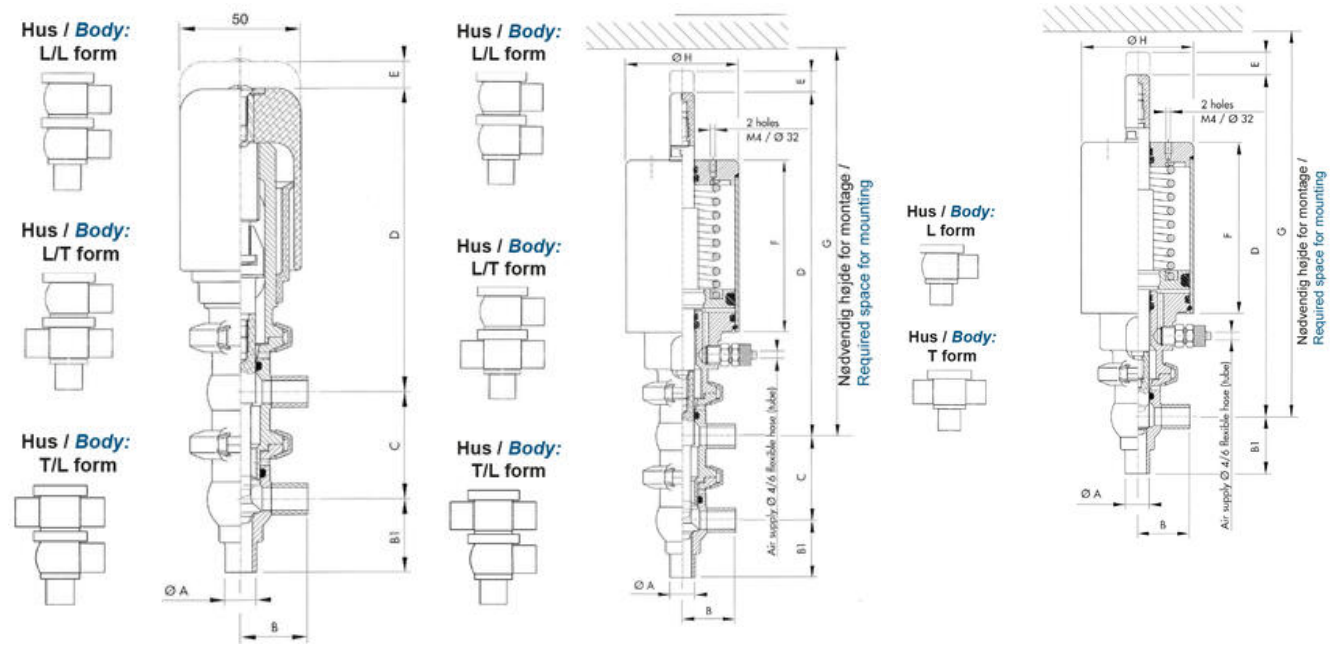



Hus / *Body:*
L form




Hus / *Body:*
T form



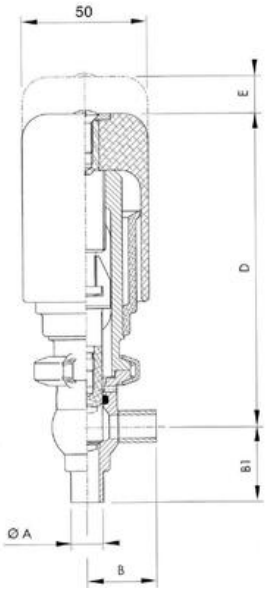





LED modul til kontrol af ventil




Hus / *Body:*
L/L form




Hus / *Body:*
L/T form




Hus / *Body:*
T/L form




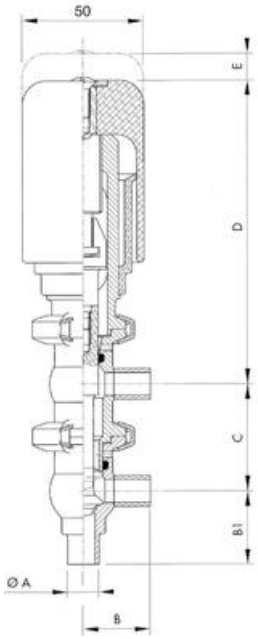

Hus / *Body:*
L/L form



Hus / *Body:*
L/T form



Hus / *Body:*
T/L form

