
DEFINOX - DCX 3 & DCX 4 MINI

Manual & Pneumatic

DE-NU025F11100 DCX3 mini, 1" L-body, Manual, PEEK/EPDM

- High packing pressure
- · Independent and compact body
- Many configuration options
- Possible use on a wide range of applications

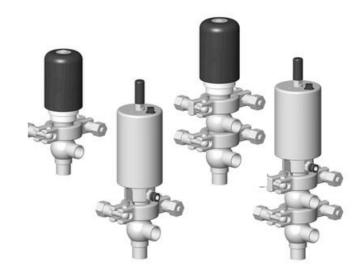

Product description

Definox Mini Seat Valves.

This seat valve design offers a wide range of options and variants.

Technical advantages:

- · From 1/2" to 1"
- \cdot Fitted with PEEK plug as standard inert to chemical products
- · Welded or Clamp ends possible
- · Ergonomic handle with visual opening indicator
- · Elastomer seal avaliable for charged products
- · High packing pressure
- · Self-contained and compact body with a wide range of configuration options:
- \cdot Possible use on a wide range of applications
- · Easy and fast maintenance thanks to the clamp assembly

Specifications

Certificate	3.1 EN10204
Connection	Weld ends
Description	PEEK PLUG
House	L Body
Housing	EPDM
Internal Diameter	22.1
Material quality	1.4404
Outer Diameter	25.4
Surface Finish	Indv.: RA 0,8μm Udv.: 1,2μm
Temperature range from	-5



Temperature range to	140
Weight	1.9
Working Pressure Max	18

