

## HONSBERG - WO1 SERIES FLOW INDICATOR

### Sight Glass

WO1-025GM

- G ¼ - 15l/min - G1½ - 220l/min
- Water , Oils
- DN-8-G ¼ - DN40-G1½
- Brass / Stainless Steel
- 16 Bar max




#### Product description

#### Specifications

<b>Connection</b>	G1 FEMALE
<b>Flow Range Max</b>	90
<b>Flow Range Min</b>	0
<b>Material of connection</b>	Brass
<b>Material of glass tube</b>	Borosilicate glass
<b>Material of seals</b>	NBR
<b>Materials Wipers</b>	NBR
<b>Media</b>	WATER, OILS
<b>Pressure Range Max</b>	16
<b>Temperature range of media from</b>	-20
<b>Temperature range of media to</b>	100
<b>Weight</b>	0.6

G	Types	L	SW	X	Weight kg
G 1/4	WO1-008G.	71	36	9	0.3
G 3/8	WO1-010G.				
G 1/2	WO1-015G.	86	46	13	0.6
G 3/4	WO1-020G.	94		16	
G 1	WO1-025G.	104			
G 1 1/4	WO1-032G.	120	65	19	1.5
G 1 1/2	WO1-040G.	130		20	1.6

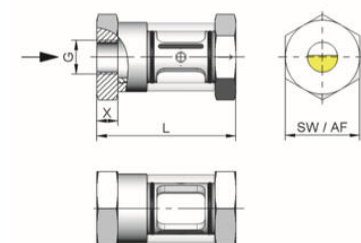

G	Types	L	SW	X	Weight kg
G 1/4	WO1-008G.	71	36	9	0.3
G 3/8	WO1-010G.				
G 1/2	WO1-015G.	86	46	13	0.6
G 3/4	WO1-020G.	94		16	
G 1	WO1-025G.	104			
G 1 1/4	WO1-032G.	120	65	19	1.5
G 1 1/2	WO1-040G.	130		20	1.6

