

HONSBERG - RVM SERIES FLOW SWITCH

Piston

RVM-008GM300
Flow SW.0.5-3l/min,G1/4"

- Switching Range 0,04..3 l/m H₂O
- Water (gas and aggressive media available on request)
- G1/4"
- Brass or Stainless Steel Wetted Parts
- Max Pressure 300 bar






Product description

Mechanical flow switch, for fluid media, with magnetic triggering of a reed switch. Robust construction in brass or stainless steel.




Specifications

| | |
|------------------------------|---|
| Accuracy | ± 10% |
| Connection | 1/4 " |
| Contact Rating Max | 20 |
| Electrical Connection | Plug connector DIN 43650-C |
| Flow Max l/min Double | 3.6 |
| Flow Range Max | 3 |
| Flow Range Min | 0.5 |
| Function | Flask, reed contact, ending |
| Hysteresis | min 1 ml / min, depending on breaking value |
| IP Class | IP65 |
| Material Bolt | Brass |
| Material of body | Nickel-plated brass |
| Material of seals | NBR |
| Materials Spring | Stainless steel 316Ti |
| Pressure drop | 0.02-0.2 bar at maximum flow |

| | |
|-------------------------------|---------------|
| Pressure Range Max | 300 |
| Temperature range of media to | 100 |
| Type of flow component | Flow Switches |
| Weight | 0.14 |
| Viscosity | 1 |
| Voltage AC max | 200 |

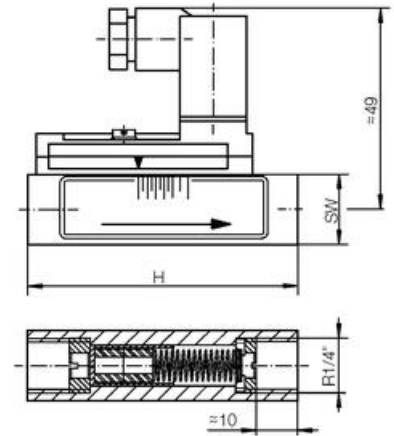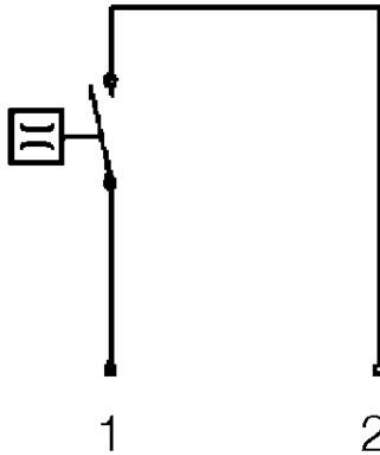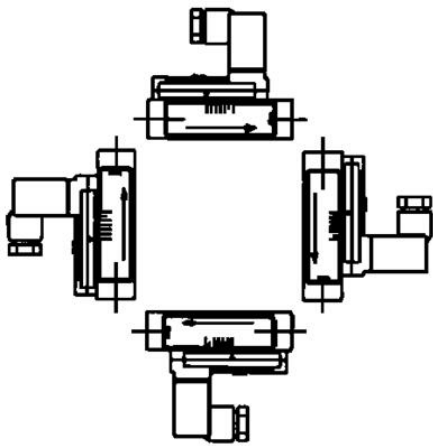

| G" | Type | H mm | L mm | SW mm | Weight kg |
|-----|-----------|------|------|-------|-----------|
| 1/4 | RVM-008GM | 65 | 49 | 17 | 0,14 |
| 1/4 | RVM-008GK | 65 | 49 | 18 | 0,15 |

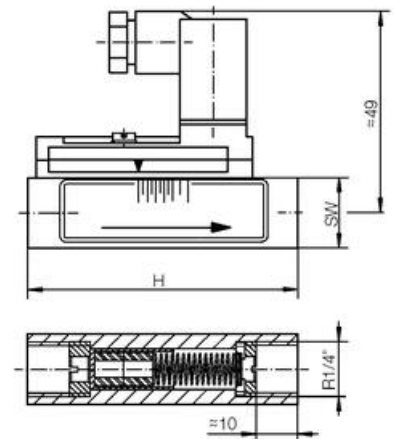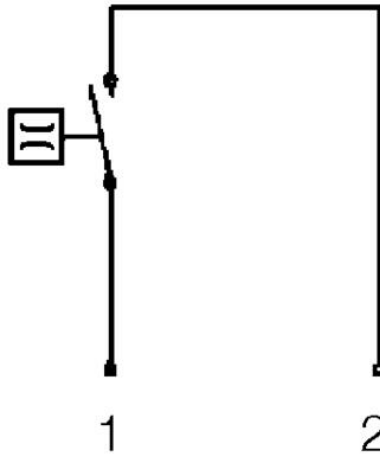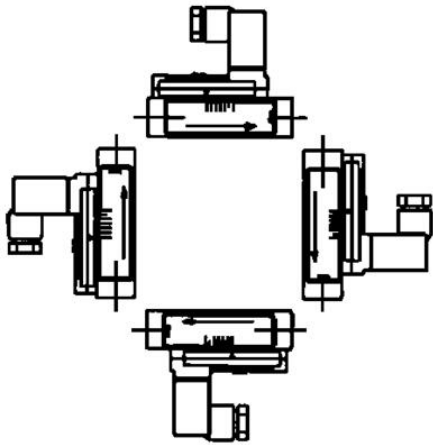

| G" | Type | H mm | L mm | SW mm | Weight kg |
|-----|-----------|------|------|-------|-----------|
| 1/4 | RVM-008GM | 65 | 49 | 17 | 0,14 |
| 1/4 | RVM-008GK | 65 | 49 | 18 | 0,15 |