

HONSBERG - GK SERIES FLOW INDICATOR

Flow display with float

GK-025GTL0100
Flow meter 1", 1-10 Nm³/h air

- Flow from 0.2 to 10 Nm²/h³/h air and 10-640 l/h water
- For pressure up to 15 bar
- With min. and max. indication



Product description

Model GK is a variable area flow meter with a scale that is easy to read. It has been developed to measure liquids and gases/air in various forms.

Special versions

- Special scales
- Reed switches

Specifications



Accuracy	+/- 3% of the final value
Connection	Internal thread, G 1 "
Flow Range Max	166.6
Flow Range Min	16.6
Function	Flow indicator, float body
Material of body	Polysulfone
Material of connection	Die cast metal
Material of seals	Viton
Materials Float	Polypropylene
Pressure drop	Max 20 mbar
Pressure Range Max	15
Temperature range of media to	60

Type of flow component



Flowmeter

Weight

0.7

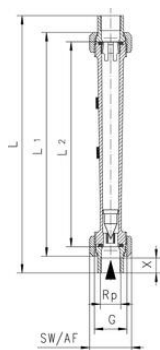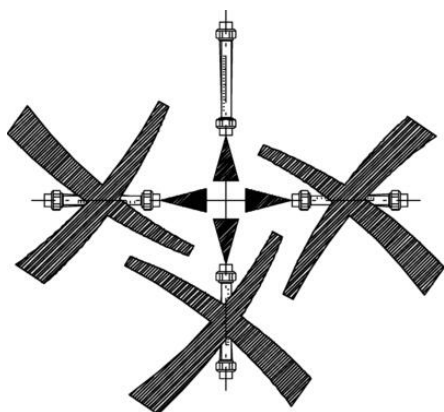

Rp	L mm	L1 mm	L2 mm	G	SW mm	X mm	Weight kg
3/8	207	180	165	3/4	32	12	0.18
1/2	215	185	170	1	41	13	0.30
3/4	230	201	185	1 1/4	50	16	0.50
1	250	219	200	1 1/2	55	19	0.65

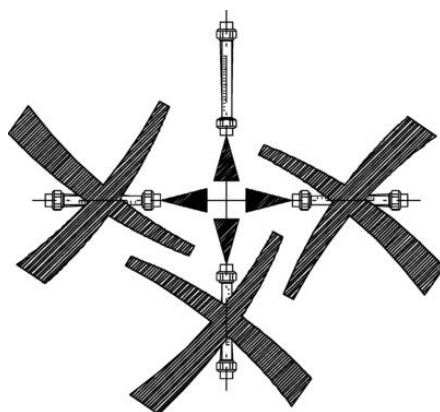

Rp	L mm	L1 mm	L2 mm	G	SW mm	X mm	Weight kg
3/8	207	180	165	3/4	32	12	0.18
1/2	215	185	170	1	41	13	0.30
3/4	230	201	185	1 1/4	50	16	0.50
1	250	219	200	1 1/2	55	19	0.65