

## HONSBERG - UR1 SERIES FLOW SWITCH

### Paddle

UR1-050GK  
42..53l/minH<sub>2</sub>O, G2F, SS

- Switching range 1,3..35 l/min
- Water (oils, gases and aggressive media available on request)
- G $\frac{3}{8}$ " up to G2"
- Brass or stainless steel wetted parts
- Max pressure 25 bar



### Product description

The Honsberg UR1 is a simple flow switch which can easily be adjusted and also changed from normally open to normally closed. The flow switch works via a spring-supported paddle which moves according to the flow and when the specific flow is reached a magnetic reed switch is activated.

### Special versions

- Plastic materials
- Weld/solder connection
- High volume OEM version
- Ex
- Switching ranges for oil or gas
- Special values
- High volume OEM version
- PVC (solder fitting)

### Ordering information

- Specify direction of flow, medium, and switching range, UR1 or switching value UR2.
- For UR2 specify normally closed (n.c.) or normally open (n.o.).
- For oils, state viscosity, temperature and designation (e.g. ISO VG 68) (enquire about range).
- For gases, state pressure (relative or absolute), temperature and medium (e.g. air) (enquire about range).

### Installation

- Include straight calming section of 5 x DN in inlet and outlet.
- Include a filter if the media is dirty (use magnetic filter for ferritic components).
- It must be ensured that the values given for voltage, current and power are not exceeded.
- When switched on, a load must be connected in series.
- The electrical details apply to ohmic loads. Capacitive, inductive and lamp loads must be operated using a protective circuit.
- Standard: horizontal inwards flow; switching head not recommended underneath; other installation positions are possible; the installation position affects the switching point and range.


### Specifications

Specifications

Adjustable Switching Point L / Min Of Water	42..53 l/min
Connection	G2" female
Contact Rating Max	50
Electrical Connection	1.5m cable
Flow Max l/min Double	150
Function	Normally open or normally closed (SPST)
IP Class	IP65
Material of connection	Stainless steel
Materials Wetted Parts	Stainless steel, Hard ferrite, PTFE coating, FKM
Media	Water (oil, air and aggressive media on request)
Pressure Range Max	25
Temperature range of media from	20
Temperature range of media to	110
Weight	0.95
Voltage AC / DC Max	1
Voltage AC max	230

Adjustment


UR1 - loosen bolts, push the switching current tube into the desired position. Retighten the bolts.  
Normally closed (n.c.) or normally open (n.o.) as per table "Technical data"

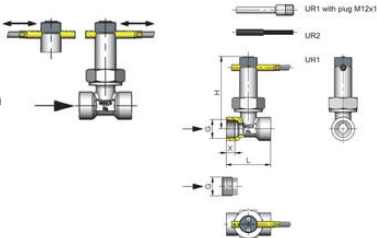

Dimensions and weights						
G	Types	H	L	X	Weight kg	
G 1/4	UR -010GM	82	50	10	UR1	UR2
	UR -010GK				0.35	0.35
	UR -015AM				0.40	0.40
G 1/2 A	UR -015AM	60	12	0.35	0.30	0.30
	UR -015AP				0.15	0.15
	UR -015GM				0.35	0.30
G 1/2	UR -015GK	50	10	0.35	0.40	0.40
	UR -020GM				0.40	0.40
	UR -020GK				0.35	0.35
G 1	UR -025GM	87	12	0.40	0.40	0.40
	UR -025GK				0.45	0.45
	UR -032GM				0.40	0.40
G 1 1/4	UR -032GM	91	12	0.50	0.50	0.50
	UR -032GK				0.55	0.55
	UR -040GM				0.65	0.65
G 1 1/2	UR -040GK	94	12	0.80	0.75	0.75
	UR -050GM				0.80	0.75
	UR -050GK				0.95	0.95

Adjustment

UR1 - loosen bolts, push the switching current tube into the desired position. Retighten the bolts.  
Normally closed (n.c.) or normally open (n.o.) as per table "Technical data"



Dimensions and weights						
G	Types	H	L	X	Weight kg	
G 1/4	UR -010GM	82	50	10	UR1	UR2
	UR -010GK				0.35	0.35
	UR -015AM				0.40	0.40
G 1/2 A	UR -015AM	60	12	0.35	0.30	0.30
	UR -015AP				0.15	0.15
	UR -015GM				0.35	0.30
G 1/2	UR -015GK	50	10	0.35	0.40	0.40
	UR -020GM				0.40	0.40
	UR -020GK				0.35	0.35
G 1	UR -025GM	87	12	0.40	0.40	0.40
	UR -025GK				0.45	0.45
	UR -032GM				0.40	0.40
G 1 1/4	UR -032GM	91	12	0.50	0.50	0.50
	UR -032GK				0.55	0.55
	UR -040GM				0.65	0.65
G 1 1/2	UR -040GK	94	12	0.80	0.75	0.75
	UR -050GM				0.80	0.75
	UR -050GK				0.95	0.95