


UNIPOLAR TERMINAL BLOCKS

ITB

ITB1015

Terminal Block 7 Way Blue 80A ITB80-7B

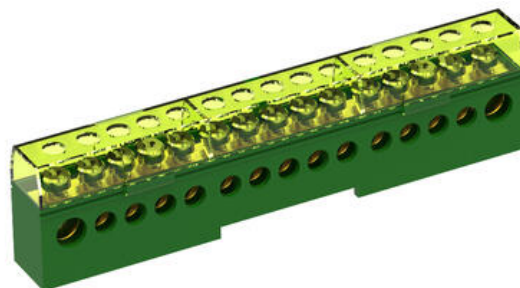

- Insulating body: PA 66 UL 94-V0
- Grey RAL 7035 - Blue RAL 5012 - Green RAL 6024
- Cover: PC UL 94-V0, transparent yellow
- Conduction block: Brass

PRODUCT DESCRIPTION

Unipolar terminal blocks are for mounting on DIN rails.

With various lengths the blocks are all rated at 80A with a nominal insulation voltage of 500 V. In

All ITB blocks comply with EN 60947-7-1 regulation

SPECIFICATIONS

Color	Blue
Connections	7
Height (H)	31
Input A: diameter	7.5
Input A: torque, max.	2
Input A: wire cross-section stranded, max.	16
Input A: wire cross-section stranded, min.	4
Input A: wire cross-section with wire-end ferrules, max.	16
Input A: wire cross-section with wire-end ferrules, min.	2.5
Input B: diameter	5.5
Input B: torque, max.	1.5
Input B: wire cross-section stranded with wire-end ferrules, max.	6
Input B: wire cross-section stranded, max.	6
Input B: wire cross-section stranded, min.	2.5
Input B: wire cross-section, stranded with wire-end ferrules, min.	1.5

Length (L)	63
Nominal insulation voltage	500
Number of inputs A	2
Number of inputs B	5
Pack size	10
Rated Current	80
Screw type	Galvanized steel screws
Weight	46
Width	15

