


## UNIPOLAR TERMINAL BLOCKS

### ITB

ITB1015

Terminal Block 7 Way Blue 80A ITB80-7B

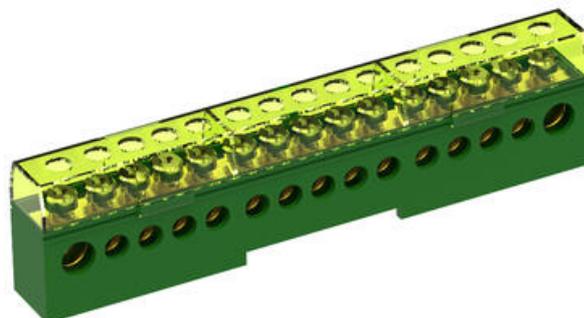

- Insulating body: PA 66 UL 94-V0
- Grey RAL 7035 - Blue RAL 5012 - Green RAL 6024
- Cover: PC UL 94-V0, transparent yellow
- Conduction block: Brass

#### Product description

Unipolar terminal blocks are for mounting on DIN rails.

With various lengths the blocks are all rated at 80A with a nominal insulation voltage of 500 V. In

All ITB blocks comply with EN 60947-7-1 regulation

#### Specifications

<b>Color</b>	Blue
<b>Connections</b>	7
<b>Height (H)</b>	31
<b>Input A: diameter</b>	7.5
<b>Input A: torque, max.</b>	2
<b>Input A: wire cross-section stranded, max.</b>	16
<b>Input A: wire cross-section stranded, min.</b>	4
<b>Input A: wire cross-section with wire-end ferrules, max.</b>	16
<b>Input A: wire cross-section with wire-end ferrules, min.</b>	2.5
<b>Input B: diameter</b>	5.5
<b>Input B: torque, max.</b>	1.5
<b>Input B: wire cross-section stranded with wire-end ferrules, max.</b>	6
<b>Input B: wire cross-section stranded, max.</b>	6
<b>Input B: wire cross-section stranded, min.</b>	2.5
<b>Input B: wire cross-section, stranded with wire-end ferrules, min.</b>	1.5

<b>Length (L)</b>	63
<b>Nominal insulation voltage</b>	500
<b>Number of inputs A</b>	2
<b>Number of inputs B</b>	5
<b>Pack size</b>	10
<b>Rated Current</b>	80
<b>Screw type</b>	Galvanized steel screws
<b>Weight</b>	46
<b>Width</b>	15

