


FUSE HOLDERS FOR CYLINDRICAL FUSES ACCORDING IEC/EN

31110

3P INS400 fixed/fc switch disconnecter

- Compact 2-in-1 Design
- Safe & Reliable Operation
- Flexible Installation

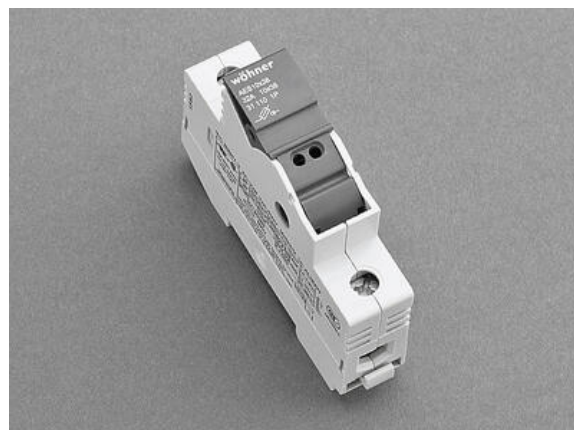

PRODUCT DESCRIPTION

SPECIFICATIONS

2047_Dimensions width x height x depth (mm)	18
2584_Rated surge voltage (Uimp)	6
Nominal socket current	32
Number of poles	1
Pack Size	12
Rated insulation voltage Ui AC	800
Rated insulation voltage Ui DC	800
Rated voltage AC	690
Utilization category AC (IEC 60947-3)	AC-22B (400V)
Weight	52