



IDEM STAINLESS STEEL IP69K SAFETY INTERLOCK SWITCH MK1-SS

224003F
MK1-SS QC M12 8way '2NC 1NO' - flat actuator

- Compact with 22mm fixing centres
- Mirror polished finish
- Small 30mm wide x 99mm long
- Replaceable contact blocks
- Standard or flexible actuator



Product description

IDEM's new MK1-SS Compact Safety Interlock switches are designed to provide position interlock detection for small moving guards. They are designed to fit to the leading edge of sliding, hinged or lift off machine guards. Mirror polished surface finish to RA10 makes the MK1-SS ideally suited to the food processing and packaging environments. The rugged Stainless Steel actuator profile is designed to match a cam mechanism to provide a positively operated not easily defeatable interlock mechanism. The compact body, 30mm wide with 22mm fixing centres and rotatable head make them easy to install where space is restricted. The rotatable heads have dual actuator entry positions to give up to 8 different entry positions. A Plastic Flexible Actuator is available for tight radius guards. Contact blocks are replaceable.

The head can be rotated to give 8 actuator entry positions.







Designed with a removable lid to fit replaceable contact blocks. For extra durability flexible actuators are available.

Specifications

Actuator	Flat
Annual usage	8 cycles per hour/24 hours per day/365 days
Approvals	ISO 14119, EN60947-5-1, EN60204-1, ISO 13849-1, EN62061, UL 508
Atex approved	No
Central Material	Stainless steel 316
Conduit entry	M12 8 Pole
Contacts	2NC 1NO
Head material	Stainless steel 316

IP Class	IP69K
Maximum approach / withdrawal speed	600
Mechanical reliability B10d	2.5 x 10 ⁶ operations at 100mA load
Mounting	2 x M4
MTTFd	356 years
Operating temperature	-25..80°C
PFHd	3.44 x 10 ⁻⁸
PL	e acc. ISO13849-1
Rated insulation voltage	600V ac
SIL	3 acc. EN62061
Thermal current (Ith)	5
Travel for positive opening	6
Withstand voltage	2500V ac

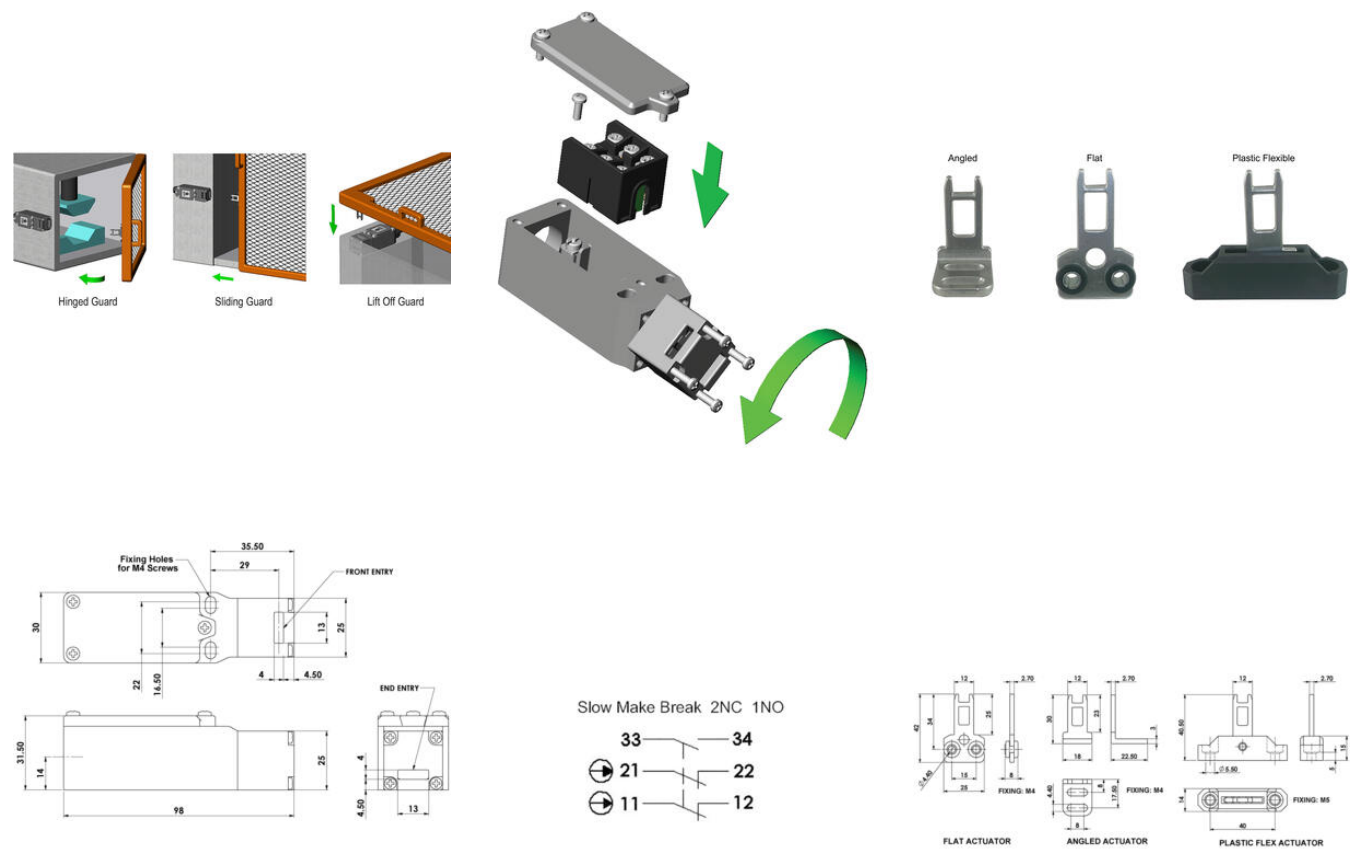

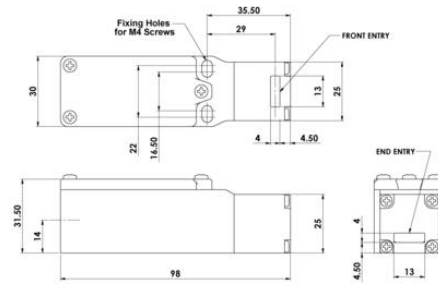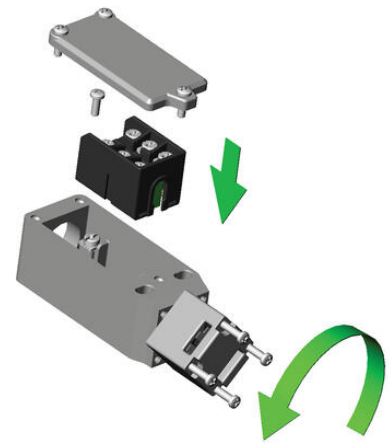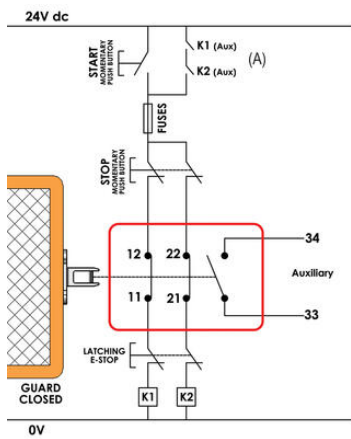

Slow Make Break 2NC 1NO

