


## EARTH TERMINALS - PSL 1.5-10MM

### PSL

27007.2

Terminal Block PSL2.5/2A 2.5sq, GNYE, Push In

- Snap on
- 2 to 4 connections
- Pluggable cross connectors
- Push button cable release
- Test pick off point

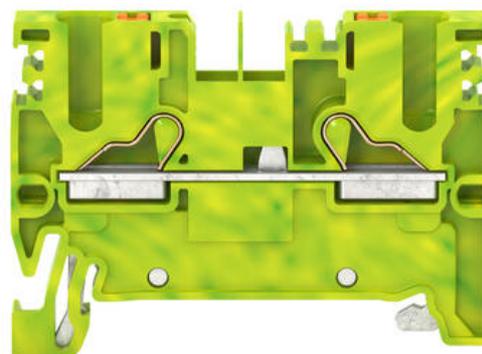

### PRODUCT DESCRIPTION

The compact and innovative connectors ensure high current carrying capacity, a pull-resistant connection and a very stable fixing to the DIN rail. The new bushing and protective earthing connectors are available in six cross-sectional areas from 1.5 mm<sup>2</sup> to 16 mm<sup>2</sup>, with 2, 3 and 4-conductor connection options with conductor areas from 0.34 mm<sup>2</sup> to 25 mm<sup>2</sup>. Two- and three-layer connectors are also available for this new range. PSL connectors are DIN-rail pluggable earthing connectors, available in 2, 3 and 4-pole up to a nominal wire size of 16mm<sup>2</sup>.

### SPECIFICATIONS

Connections	2
Contamination degree	3
Country of origin	CZ
Cross connect channels	1
Cross section single wire from	0.14
Cross section single wire to	4
Cross section stranded wire from	0.14
Cross section stranded wire to	2.5
Cross section stranded with ferrule from	0.14
Cross section stranded with ferrule to	2.5
Cross-Section	2.5
Flamklass	UL94-V0
Height	35.2
Height TS 35/7.5	36.7
Length	48.5

Number of levels	1
Number of terminals per level	2
Operating temperature from	-40
Operating temperature to	120
Overvoltage category	III
Pack Size	50
Plug gauge acc. EN 60 947-1	A3
Rated impulse voltage	6
Rated wire cross section from	26
Rated wire cross section to	12
Stripping Length	10
Tariff code	85369010
Weight	9.09
Width	5.1

