


## FUSE TERMINALS - FTRK/FSIK

FTRK, FSIK

3239.4

FSIK 4/2A/MT BK

- For glass tube fuses 5x20
- For automotive fuses
- Material polyamide 6.6
- Temperature resistance -40°C...+120°C

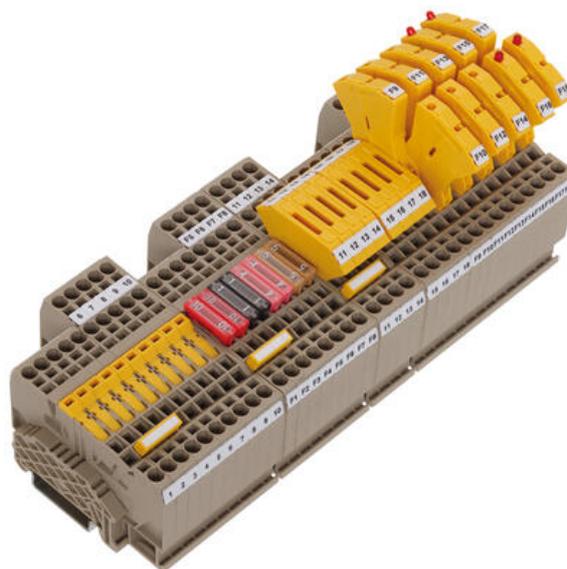

### PRODUCT DESCRIPTION

#### SPECIFICATIONS

Approvals	Pending, CSA, cCSAus, KEMA KUR
Color	Black
Connections	2
Contamination degree	3
Country of origin	BG
Cross connect channels	1
Cross section single wire from	0.2
Cross section single wire to	4
Cross section stranded wire from	0.2
Cross section stranded wire to	2.5
Cross section stranded with ferrule from	0.2
Cross section stranded with ferrule to	2.5
Cross-Section	4
CSA test standard	C22.2 No 158
CSAus test standard	UL 1059
Flamklass	UL94-V0
Fuse size	Blade Disconnect

Height	46
Height TS 35/7.5	47
KEMA KEUR test standard	EN 60947-7-3:2009
Length	67.5
Number of levels	1
Operating temperature from	-40
Operating temperature to	120
Overvoltage category	III
Pack Size	50
Plug gauge acc. EN 60 947-1	A3
Rated Current	18
Rated Current CSA	15
Rated current CSAus	15
Rated Current IEC	18
Rated Current To UL	15
Rated impulse voltage	6
Rated wire cross section from (AWG)	24
Rated wire cross section to (AWG)	10
Rated Voltage	400
Rated voltage CSAus	300
Rated Voltage IEC	400
Rated Voltage To UL	300
Rated voltage UL	300
Stripping Length	12
Tariff code	85369010
UL test standard	UL 1059
Weight	13.72
Width	6.1
Voltage CSA	300