


EARTH TERMINALS - SNAP ON - SSL 2.5-35 MM²

SSL

17103.2

Terminal block SSL 2.5sq Earth

- Snap on construction
- Secure fixings on both sides of the rail
- Can be cross connected
- Material polyamide 6.6- UL94-V0
- emperature resistance -40 °C...+120 °C

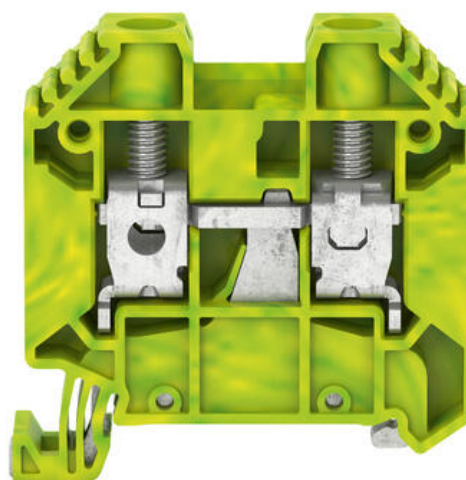

PRODUCT DESCRIPTION

SPECIFICATIONS

Approvals	UL, CSA, GL, CSA US, cUL, KEMA KUR, EAC
Connections	2
Contamination degree	3
Country of origin	DE
Cross connect channels	1
Cross section single wire from	0.2
Cross section single wire to	4
Cross section stranded wire from	0.2
Cross section stranded wire to	4
Cross section stranded with ferrule from	0.2
Cross section stranded with ferrule to	2.5
Cross-Section	2.5
CSA test standard	C22.2 No 158
CSAus test standard	UL 1059
cUL test standard	C22.2 No 158
EAC test standard	TR ZU 004/2011
Explosion proof	Yes
Flamklass	UL94-V0

GL test standard	IEC 60947-7-2:2009
Height TS 35/7.5	47
KEMA KEUR test standard	EN 60947-7-2:2009
Length	48
Number of levels	1
Number of test pick off options	1
Operating temperature from	-40
Operating temperature to	120
Overvoltage category	III
Pack Size	100
Plug gauge acc. EN 60 947-1	A3
Rated wire cross section from (AWG)	30
Rated wire cross section to (AWG)	12
Screw size	M 2,5
Stripping Length	10
Tariff code	85369010
Torque max	0.8
Torque Min	0.4
UL test standard	UL 1059
Weight	11.51
Width	5

