


## FUSE TERMINALS - ZTRK 2.5MM<sup>2</sup>, OT/ZS

ZTRK/OT, ZTRK/ZS

3609.2

ZTRK 2,5/2A/OT BG

- Material polyamide 6.6
- Temperature resistance -40°C...+120°C
- Fire-resistance class V0
- Current limited by an automotive fuse 10 A

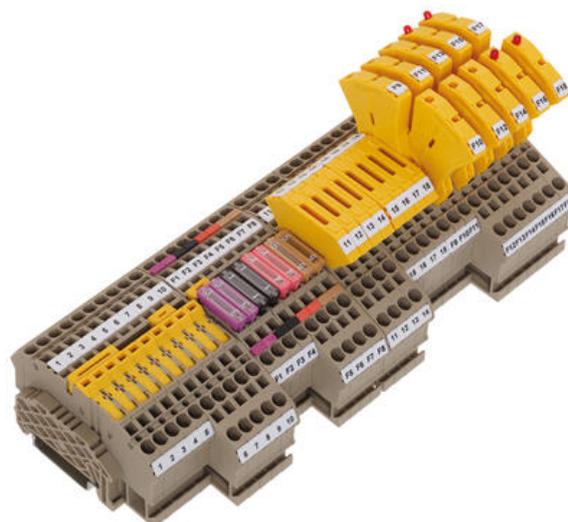

### PRODUCT DESCRIPTION

### SPECIFICATIONS

Additional information	without function element
Approvals	CSA, CSA US, KEMA KUR
Color	Beige
Connections	2
Contamination degree	3
Country of origin	CZ
Cross connect channels	1
Cross section single wire from	0.5
Cross section single wire to	4
Cross section stranded wire from	0.5
Cross section stranded wire to	4
Cross section stranded with ferrule from	0.5
Cross section stranded with ferrule to	2.5
Cross-Section	2.5
CSA test standard	C22.2 No 158
CSAus test standard	UL 1059
Flamklass	UL94-V0
Height TS 35/7.5	39.2

KEMA KEUR test standard	EN 60947-7-1:2009, EN 60947-7-3:2009
Length	68
Number of levels	1
Number of test pick off options	2
Operating temperature from	-40
Operating temperature to	120
Overvoltage category	III
Pack Size	100
Plug gauge acc. EN 60 947-1	A3
Rated Current IEC	18
Rated impulse voltage	6
Rated wire cross section from (AWG)	20
Rated wire cross section to (AWG)	12
Rated Voltage IEC	400
Stripping Length	10
Tariff code	85369010
Weight	8.82
Width	5.1

