


FUSE TERMINALS - ZTRK 2.5MM², OT/ZS

ZTRK/OT, ZTRK/ZS

3609.2

ZTRK 2,5/2A/OT BG

- Material polyamide 6.6
- Temperature resistance -40°C...+120°C
- Fire-resistance class V0
- Current limited by an automotive fuse 10 A

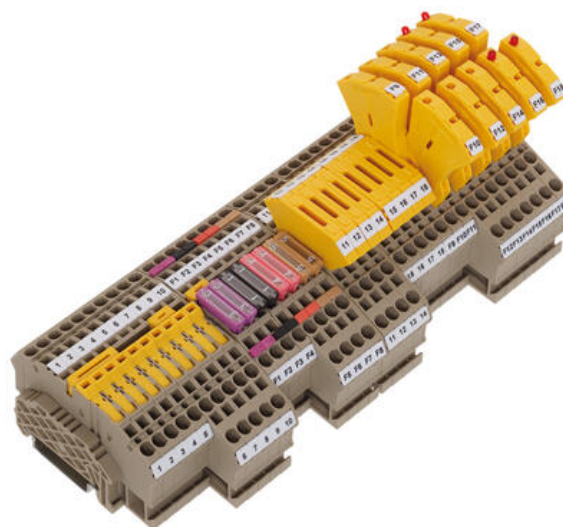

PRODUCT DESCRIPTION

SPECIFICATIONS

| | |
|--|--------------------------|
| Additional information | without function element |
| Approvals | CSA, CSA US, KEMA KUR |
| Color | Beige |
| Connections | 2 |
| Contamination degree | 3 |
| Country of origin | CZ |
| Cross connect channels | 1 |
| Cross section single wire from | 0.5 |
| Cross section single wire to | 4 |
| Cross section stranded wire from | 0.5 |
| Cross section stranded wire to | 4 |
| Cross section stranded with ferrule from | 0.5 |
| Cross section stranded with ferrule to | 2.5 |
| Cross-Section | 2.5 |
| CSA test standard | C22.2 No 158 |
| CSAus test standard | UL 1059 |
| Flamklass | UL94-V0 |
| Height TS 35/7.5 | 39.2 |

| | |
|-------------------------------------|--------------------------------------|
| KEMA KEUR test standard | EN 60947-7-1:2009, EN 60947-7-3:2009 |
| Length | 68 |
| Number of levels | 1 |
| Number of test pick off options | 2 |
| Operating temperature from | -40 |
| Operating temperature to | 120 |
| Overvoltage category | III |
| Pack Size | 100 |
| Plug gauge acc. EN 60 947-1 | A3 |
| Rated Current IEC | 18 |
| Rated impulse voltage | 6 |
| Rated Voltage IEC | 400 |
| Rated wire cross section from (AWG) | 20 |
| Rated wire cross section to (AWG) | 12 |
| Stripping Length | 10 |
| Tariff code | 85369010 |
| Weight | 8.82 |
| Width | 5.1 |

