


## MODULAR TERMINALS FOR 3-WIRE AND 4-WIRE DEVICES - ZIZA/ZMP

ZIZA, ZMP

3528.2

ZIZA 1.5/3, 3 wire Initiator base terminal with foot

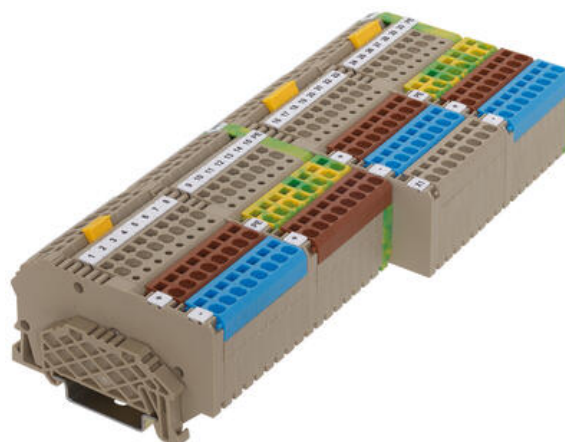

- Modular connector system for 3- and 4-wire actuators
- Material polyamide 6.6
- Temperature resistance -40°C...+120°C
- Fire-resistance class V0

### PRODUCT DESCRIPTION

#### SPECIFICATIONS

Approvals	UL, CSA, GL, CSA US, cUL, KEMA KUR
Color	Beige
Connections	4
Contamination degree	3
Country of origin	CZ
Cross connect channels	1
Cross section single wire from	0.5
Cross section single wire to	2.5
Cross section stranded wire from	0.5
Cross section stranded wire to	2.5
Cross section stranded with ferrule from	0.5
Cross section stranded with ferrule to	1.5
Cross-Section	1.5
CSA test standard	C22.2 No 158
CSAus test standard	UL 1059
cUL test standard	C22.2 No 158
Flamklass	UL94-V0
GL test standard	IEC 60947-7-1:2009
Height TS 35/7.5	40.5

KEMA KEUR test standard	EN 60947-7-1:2009
Length	68.7
Number of levels	1
Number of test pick off options	0
Operating temperature from	-40
Operating temperature to	120
Overvoltage category	III
Pack Size	100
Plug gauge acc. EN 60 947-1	A1
Rated Current CSA	12.5
Rated current CSAus	12.5
Rated Current IEC	17.5
Rated impulse voltage	4
Rated voltage CSAus	300
Rated Voltage IEC	400
Rated wire cross section from (AWG)	26
Rated wire cross section to (AWG)	14
Stripping Length	8
Tariff code	85369010
UL test standard	UL 1059
Voltage CSA	300
Weight	7
Width	5.1

