


## FEED THROUGH TERMINALS - FRK 1.5-16MM<sup>2</sup>

FRK

3200.2

FRK 1.5/2A Beige, 1.5mm<sup>2</sup> Push-in feed through

- Wiring without tools
- Material polyamide 6.6
- Temperature resistance -40 °C...+120 °C
- Flammability class V0
- See also FRKI for additional sizes

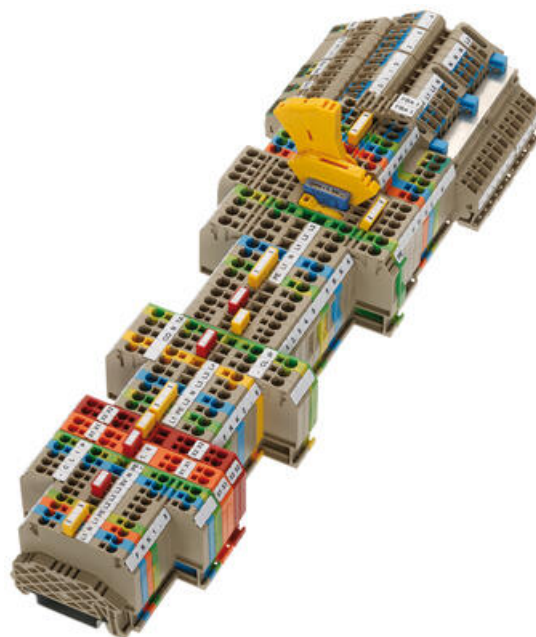

### PRODUCT DESCRIPTION

The FRK series is the 1st generation of an innovative range of push-in connection terminals. It ranges from the smallest cross-section of 0.2 mm<sup>2</sup> to 16 mm<sup>2</sup> in feed-through and snap on Earths, disconnect, fuse and installation terminals. The push-in connection enables a safe and fast connection of rigid and flexible conductors with wire end ferrules. The clever range of accessories significantly reduces assembly and storage costs. With the pluggable potential distribution systems FQI, potentials can be easily multiplied. The compact FRKI range completes the offer with 6 -10mm compact terminals to complement the FRK offer.

### SPECIFICATIONS

Approvals	CSA, CSA US, KEMA KUR, EAC
Color	Beige

Connections	2
Contamination degree	3
Country of origin	BG
Cross connect channels	2
Cross section single wire from	0.2
Cross section single wire to	1.5
Cross section stranded wire from	0.2
Cross section stranded wire to	1.5
Cross section stranded with ferrule from	0.2
Cross section stranded with ferrule to	1.5
Cross-Section	1.5
CSA test standard	C22.2 No 158
CSAus test standard	UL 1059
EAC test standard	TR ZU 004/2011
Flamklass	UL94-V0
Height TS 35/7.5	43
KEMA KEUR test standard	EN 60947-7-1:2009
Length	48.5
Number of levels	1
Operating temperature from	-40
Operating temperature to	120
Overvoltage category	III
Pack Size	100
Plug gauge acc. EN 60 947-1	A1
Rated Current CSA	16
Rated current CSAus	16
Rated Current IEC	17.5
Rated impulse voltage	8
Rated voltage CSAus	600
Rated Voltage IEC	800
Rated wire cross section from (AWG)	24
Rated wire cross section to (AWG)	16
Stripping Length	12
Tariff code	85369010

Voltage CSA	600
Weight	6.7
Width	4.1

