


DISCONNECT TERMINALS - FTRK 2.5MM²

FTRK

3259.2
FTRK 2,5/2A/MT BG

- Material polyamide 6.6
- Temperature resistance -40 °C...+120 °C
- Flammability class V0

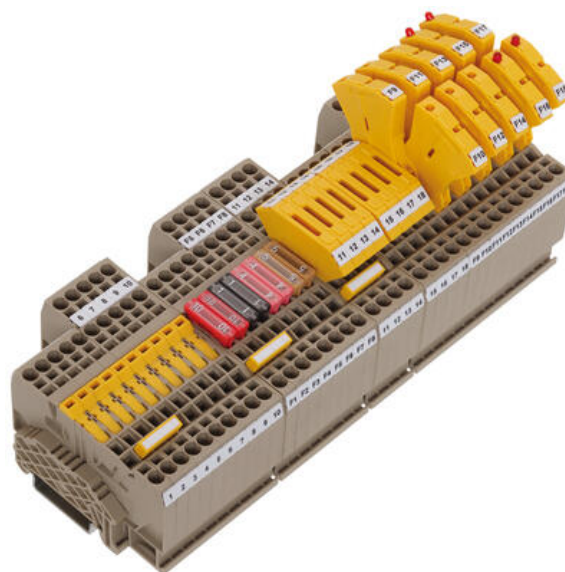

PRODUCT DESCRIPTION SPECIFICATIONS

Additional information	with disconnect blade
Approvals	CSA, CSA US, KEMA KUR
Color	Beige
Connections	2
Contamination degree	3
Country of origin	CZ
Cross connect channels	1
Cross section single wire from	0.2
Cross section single wire to	4
Cross section stranded wire from	0.2
Cross section stranded wire to	4
Cross section stranded with ferrule from	0.2
Cross section stranded with ferrule to	2.5
Cross-Section	2.5
CSA test standard	C22.2 No 158
CSAus test standard	UL 1059
Flamklass	UL94-V0

Height TS 35/7.5	45.6
KEMA KEUR test standard	EN 60947-7-1:2009, EN 60947-7-3:2009
Length	67.5
Number of levels	1
Operating temperature from	-40
Operating temperature to	120
Overvoltage category	III
Pack Size	100
Plug gauge acc. EN 60 947-1	A3
Rated Current CSA	15
Rated current CSAus	15
Rated Current IEC	18
Rated impulse voltage	6
Rated voltage CSAus	300
Rated Voltage IEC	400
Rated wire cross section from (AWG)	20
Rated wire cross section to (AWG)	12
Stripping Length	10
Tariff code	85369010
Voltage CSA	300
Weight	11.93
Width	5.1

