


DOUBLE DECK TERMINALS - FRKD/FSLD 2.5MM²

FRKD,FSLD,

3226.1

FRKD 2.5 Green, 2.5mm² Push-in double deck

- Wiring without tools
- Internally linked versions
- Colour coded options
- 2 and 3 connections
- Electronic component versions

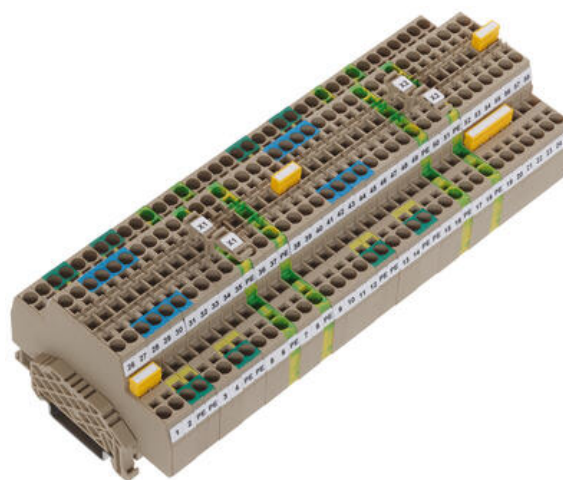

PRODUCT DESCRIPTION

SPECIFICATIONS

Approvals	CSA, CSA US, KEMA KUR, EAC
Color	Green
Connections	2 x 2
Contamination degree	3
Country of origin	BG
Cross connect channels	2
Cross section single wire from	0.2
Cross section single wire to	4
Cross section stranded wire from	0.2
Cross section stranded wire to	4
Cross section stranded with ferrule from	0.2
Cross section stranded with ferrule to	2.5
Cross-Section	2.5
CSA test standard	C22.2 No 158
CSAus test standard	UL 1059
EAC test standard	TR ZU 004/2011
Flamklass	UL94-V0
Height TS 35/7.5	53
KEMA KEUR test standard	EN 60947-7-1:2009

Length	75.4
Number of levels	2
Operating temperature from	-40
Operating temperature to	120
Overvoltage category	III
Pack Size	100
Plug gauge acc. EN 60 947-1	A3
Rated Current CSA	20
Rated current CSAus	20
Rated Current IEC	24
Rated impulse voltage	6
Rated voltage CSAus	300
Rated Voltage IEC	500
Rated wire cross section from (AWG)	26
Rated wire cross section to (AWG)	14
Stripping Length	12
Tariff code	85369010
Voltage CSA	300
Weight	14.57
Width	5.1

