


3-WIRE INSTALLATION TERMINALS - FDLI

FDLI

3283.2
FDLI 2,5-4 NT/L/PE

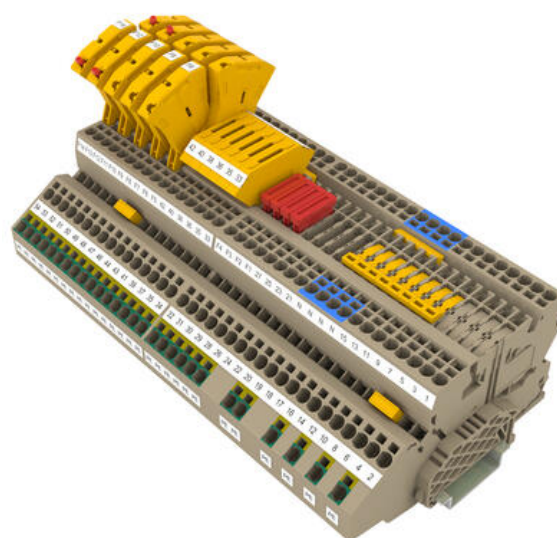

- Only 5.1mm wide
- Base terminal with wide range of options
- Snap on Earth on both sides
- Disconnect and fuse options

PRODUCT DESCRIPTION

The base terminals of the FDLI 2.5-4 series are available in eight different versions. This range offers you the best all round solution, whether you are using our feed-through terminals, feedthrough terminals with disconnect-blade or the empty terminal versions together with custom-fit accessories.

All can be combined together in one neat package with a uniform size to give a professional and easy to wire solution

SPECIFICATIONS

Approvals	EAC
Color	Beige
Connections	5
Contamination degree	3
Country of origin	DE
Cross connect channels	2
Cross section single wire from	0.2
Cross section single wire to	4
Cross section stranded wire from	0.2
Cross section stranded wire to	4
Cross section stranded with ferrule from	0.2
Cross section stranded with ferrule to	2.5
Cross-Section	4
EAC test standard	TR ZU 004/2011

Flamklass	UL94-V0
Height TS 35/7.5	55.6
Length	101
Load Current Max	32
Operating temperature from	-40
Operating temperature to	120
Overvoltage category	III
Pack Size	50
Plug gauge acc. EN 60 947-1	A3
Rated Current IEC	18
Rated impulse voltage	6
Rated Voltage IEC	400
Rated wire cross section from (AWG)	26
Rated wire cross section to (AWG)	10
Stripping Length	12
Tariff code	85369010
Weight	27.25
Width	5.1