
DOUBLE DECK TERMINALS - SRKD/SSLD 2.5-10MM²

SRKD, SSLD

17180.2
Terminal Block SRKD 2.5sq Double Deck Beige

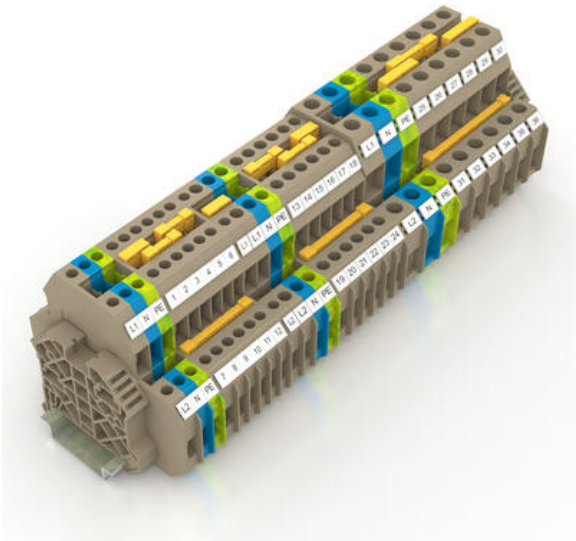

- Pluggable cross connectors
- Compatible with SRK series
- Snap on Earth
- Linked versions
- Material polyamide 6.6 UL 94-V0

PRODUCT DESCRIPTION

The SRKD terminal blocks are available to suit wire sizes 2.5 mm², 4 mm² and 10 mm². The standard SRKD models have two potentials with 2 x 2 connections, further options include linked versions with four connections on one potential and as a protective earth terminal with a snap-on PE foot contact. The SRKD range is compatible with the 'Plug in' cross connectors used in the existing SRK range. Just like the established SRK series, the new SKRD units feature a compact housing and provide excellent stability, vibration resistance, and optimal attachment of the wires to the contact point. The terminals are equipped with a large wire entry bay that makes the insertion of wires easy and effortless. The connection of multiple wires is also possible. The terminal's robust housing safely anchors all the metal parts on the inside. The foot construction of the snap-on units ensures a reliable, firm hold on the mounting rail.

SPECIFICATIONS

Cross-Section	2.5
Color	Beige
Rated Voltage IEC	1000
Rated Current IEC	24
Load Current Max	32
Rated impulse voltage	8
Overvoltage category	III
Contamination degree	3
Approvals	UL, cUL, KEMA KUR, EAC

Length	76
Width	5.1
Height TS 35/7.5	65

Connections	2 x 2

Number of levels	2
Plug gauge acc. EN 60 947-1	A3
Cross connect channels	3
Number of test pick off options	1
Cross section single wire from	0.2
Cross section single wire to	4
Cross section stranded wire from	0.2
Cross section stranded wire to	4
Cross section stranded with ferrule from	0.2
Cross section stranded with ferrule to	2.5
Rated wire cross section from (AWG)	30
Rated wire cross section to (AWG)	12
Stripping Length	10
Screw size	M 2,5
Torque Min	0.4
Torque max	0.8

Flamklass	UL94-V0
Operating temperature from	-40
Operating temperature to	120

Rated Voltage To UL	600
Rated Current To UL	20
UL test standard	UL 1059
Rated voltage cUL	600
Rated current cUL	20
cUL test standard	C22.2 No 158
EAC test standard	TR ZU 004/2011
KEMA KEUR test standard	EN 60947-7-1:2009

Tariff code	85369010
Country of origin	CZ
Weight	15.85
Pack Size	100

