




## TRS RUBBER FLEX

CA3C1.5TRS

Cable Rubber Flex 3 Core X 1.5sq H07RNF

- U0/U: 450/750 V AC rms according to IEC
- Bare Copper
- U0/U: 450/750 V AC rms according to IEC
- H07RN-F

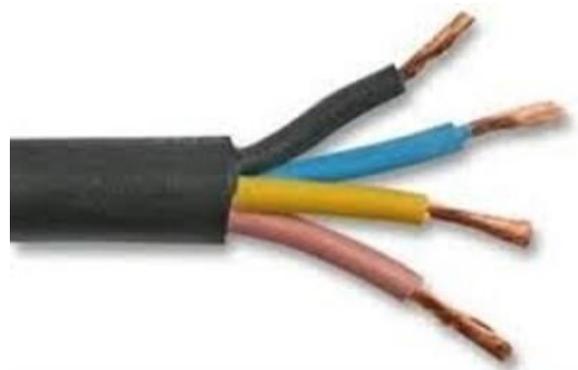

### PRODUCT DESCRIPTION

#### SPECIFICATIONS

Conductor size	1.5
Number of cores	3