
TRS RUBBER FLEX

CA3C1.5TRS
Cable Rubber Flex 3 Core X 1.5sq H07RNF

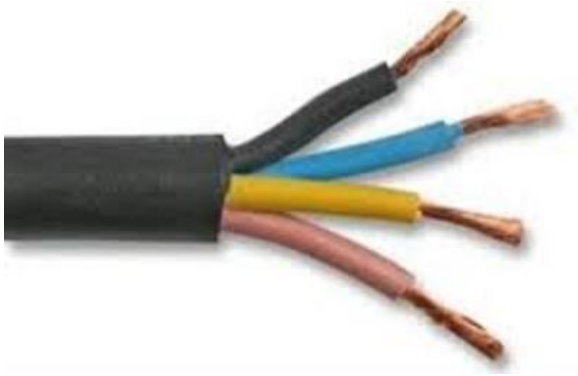

- U0/U: 450/750 V AC rms according to IEC
- Bare Copper
- U0/U: 450/750 V AC rms according to IEC
- H07RN-F

PRODUCT DESCRIPTION

SPECIFICATIONS

Conductor size	1.5
Number of cores	3