


TRS RUBBER FLEX

CA3C2.5TRS

Cable Rubber Flex 3 Core X 2.5sq HO7RNF

- U0/U: 450/750 V AC rms according to IEC
- Bare Copper
- U0/U: 450/750 V AC rms according to IEC
- H07RN-F

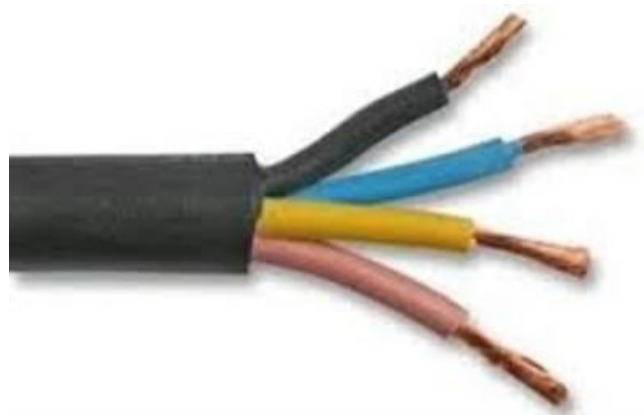

Product description

Specifications

Conductor size	2.5
Number of cores	3