


17180.2

SRKD 2,5 BG

SRKD 2,5 BG

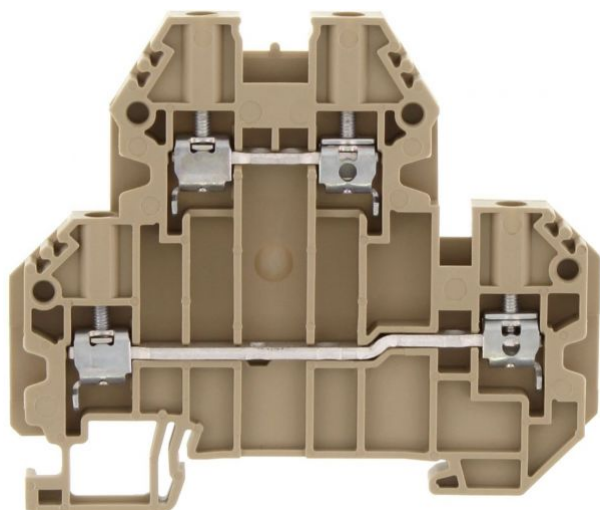

M2.5



EAC



Double-level terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 2.5 mm², Width: 5.1 mm, Colour: Beige

Business data

| | |
|--|-----------------------|
| Product description | Double-level terminal |
| Packaging unit | 100 |
| Quantity unit | PC |
| Weight per piece (not including packaging) | 15.75 |
| Weight per piece (including packaging) | 15.85 |
| Unit of weight | G |
| Customs number | 85369010 |
| Country of origin | DE |

17180.2

SRKD 2,5 BG

SRKD 2,5 BG

Technical Data

Dimensions

| | |
|------------------|--------|
| Length | 76 mm |
| Width | 5.1 mm |
| Height TS 35/7.5 | 65 mm |

Ratings

| | |
|-----------------------|---------------------|
| Rated voltage | 1000 V |
| Rated current | 24 A |
| Current load, max. | 32 A |
| Rated cross-section | 2.5 mm ² |
| Rated impulse voltage | 8 kV |
| Overvoltage category | III |
| Contamination degree | 3 |

17180.2

SRKD 2,5 BG

SRKD 2,5 BG

Technical Data

Connection data

| | |
|--|---------------------|
| Connection principle | Screw connection |
| Connection position | Lateral |
| Connections | 2 x 2 |
| Number of terminals per level | 2 |
| Number of levels | 2 |
| Wire cross-section single-core (rigid) / stranded, min. | 0.2 mm ² |
| Wire cross-section single core (rigid)/stranded, max. | 4 mm ² |
| Wire cross-section stranded, min. | 0.2 mm ² |
| Wire cross-section stranded, max. | 4 mm ² |
| Wire cross-section stranded with wire-end ferrules, min. | 0.2 mm ² |
| Wire cross-section stranded with wire-end ferrules, max. | 2.5 mm ² |
| Wire cross-section AWG, min. | 30 |
| Wire cross-section AWG, max. | 12 |
| Stripping length | 10 mm |
| Screw head | Slotted |
| Screw threading | M 2,5 |
| Tightening torque, min. | 0.4 Nm |
| Tightening torque, max. | 0.8 Nm |

17180.2

SRKD 2,5 BG

SRKD 2,5 BG

Technical Data

Materials

| | |
|--------------------|---------------|
| Insulation housing | Polyamide 6.6 |
|--------------------|---------------|

| | |
|--------------------------|-----|
| Flammability class UL 94 | V-0 |
|--------------------------|-----|

| | |
|---------------------------|--------|
| Working temperature, min. | -40 °C |
|---------------------------|--------|

| | |
|---------------------------|--------|
| Working temperature, max. | 120 °C |
|---------------------------|--------|

Further technical data

| | |
|---------------|-------------------------|
| Mounting type | Mounting rail TS 35/7,5 |
|---------------|-------------------------|

| | |
|--------------------------------|----|
| Gauge plug acc. to EN 60 947-1 | A3 |
|--------------------------------|----|

| | |
|-------------------------------------|---|
| Number of cross-connection channels | 3 |
|-------------------------------------|---|

| | |
|--------------------|---|
| End plate required | ✓ |
|--------------------|---|

| | |
|---------------------------------|---|
| Number of test pick-off options | 1 |
|---------------------------------|---|

17180.2

SRKD 2,5 BG

SRKD 2,5 BG

Approvals

Standards and regulations

| | |
|----------------------|----------------|
| EAC approval | TR ZU 004/2011 |
| EAC approval granted | ✓ |

cUL Recognized

| | |
|--|--------------|
| cUL Recognized | C22.2 No 158 |
| cUL Recognized | ✓ |
| cUL Usegroup B: rated voltage | 600 V |
| cUL Usegroup B: rated current | 20 A |
| cUL Usegroup C: rated voltage | 600 V |
| cUL Usegroup C: rated current | 20 A |
| cUL Usegroup D: rated voltage | 600 V |
| cUL Usegroup D: rated current | 20 A |
| cUL wire cross-section single-core (rigid) AWG, min. | 30 |
| cUL wire cross-section single-core (rigid) AWG, max. | 12 |
| cUL wire cross-section stranded AWG, min. | 30 |
| cUL wire cross-section stranded AWG, max. | 12 |
| cUL torque, min. | 0.4 Nm |
| cUL torque, max. | 0.8 Nm |
| cUL wire material | Cu |

KEMA KEUR approval

| | |
|---|---------------------|
| KEMA KEUR approval | EN 60947-7-1 |
| KEMA KEUR approval granted | ✓ |
| KEMA rated voltage | 1000 V |
| KEMA rated current | 24 A |
| KEMA rated impulse voltage | 8 kV |
| KEMA wire cross-section single core (rigid), min. | 0.2 mm ² |
| KEMA wire cross-section single-core (rigid), max. | 4 mm ² |
| KEMA wire cross-section stranded, min. | 0.2 mm ² |
| KEMA wire cross-section stranded, max. | 4 mm ² |

17180.2

SRKD 2,5 BG

SRKD 2,5 BG

Approvals

UL Recognized

| | |
|---|------------|
| UL Recognized | UL 1059 |
| UL Recognized granted | ✓ |
| UL Usegroup B: rated voltage | 600 V |
| UL Usegroup B: rated current | 20 A |
| UL Usegroup C: rated voltage | 600 V |
| UL Usegroup C: rated current | 20 A |
| UL Usegroup D: rated voltage | 600 V |
| UL Usegroup D: rated current | 20 A |
| UL wire cross-section single-core (rigid) AWG, min. | 30 |
| UL wire cross-section single-core (rigid) AWG, max. | 12 |
| UL wire cross-section stranded AWG, min. | 30 |
| UL wire cross-section stranded AWG, max. | 12 |
| UL torque, min. | 3.5 Lb In. |
| UL torque, max. | 7 Lb In. |
| UL wire material | Cu |
| UL factory wiring | ✓ |
| UL field wiring | ✓ |

17180.2

SRKD 2,5 BG

SRKD 2,5 BG

Media



M2.5 

EAC



CRV[®] US

17180.2

SRKD 2,5 BG

SRKD 2,5 BG

Accessories

End plate




End plate, Width: 1.5 mm, Colour: Beige

In general

| Order number | Article designation | GTIN (EAN) | Packaging unit |
|--------------|---------------------|---------------|----------------|
| 17292.2 | SAPD 2,5-4 | 4044211190828 | 20 PC |

End bracket



End stop, Mounting type: Mounting rail TS 35/7.5 and TS 35/15, Width: 8 mm, Colour: Beige

In general

| Order number | Article designation | GTIN (EAN) | Packaging unit |
|--------------|---------------------|---------------|----------------|
| 17250.2 | SES 35 | 4044211178253 | 50 PC |

17180.2

SRKD 2,5 BG

SRKD 2,5 BG

Accessories

Insulating cover for cross-connector




Insulating cap, Colour: Yellow

In general

| Order number | Article designation | GTIN (EAN) | Packaging unit |
|--------------|---------------------|---------------|----------------|
| 17200.8 | SQIK 2,5-10 | 4044211148539 | 20 PC |

Insulated cross connector

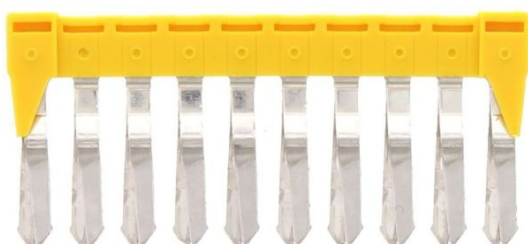

Insulated cross-connector, No. of poles: 10, Mounting type: Plug in, Width: 50.7 mm, Rated cross-section: 2.5 mm², Colour: Yellow

In general

| Order number | Article designation | GTIN (EAN) | Packaging unit |
|--------------|---------------------|---------------|----------------|
| 17209.8 | SQI 2,5/10 | 4044211148621 | 10 PC |

17180.2

SRKD 2,5 BG

SRKD 2,5 BG

Accessories

Insulated cross connector



Insulated cross-connector, No. of poles: 2, Mounting type: Plug in, Width: 9.9 mm, Rated cross-section: 2.5 mm², Colour: Yellow

In general

| Order number | Article designation | GTIN (EAN) | Packaging unit |
|--------------|---------------------|---------------|----------------|
| 17201.8 | SQI 2,5/2 | 4044211148546 | 50 PC |



Insulated cross-connector, No. of poles: 3, Mounting type: Plug in, Width: 15 mm, Rated cross-section: 2.5 mm², Colour: Yellow

In general

| Order number | Article designation | GTIN (EAN) | Packaging unit |
|--------------|---------------------|---------------|----------------|
| 17202.8 | SQI 2,5/3 | 4044211148553 | 50 PC |

17180.2

SRKD 2,5 BG

SRKD 2,5 BG

Accessories


Insulated cross connector



Insulated cross-connector, No. of poles: 30, Mounting type: Plug in, Width: 152.7 mm, Rated cross-section: 2.5 mm², Colour: Yellow

In general

| Order number | Article designation | GTIN (EAN) | Packaging unit |
|--------------|---------------------|---------------|----------------|
| 17210.8 | SQI 2,5/30 | 4044211148638 | 5 PC |



Insulated cross-connector, No. of poles: 4, Mounting type: Plug in, Width: 20.1 mm, Rated cross-section: 2.5 mm², Colour: Yellow

In general

| Order number | Article designation | GTIN (EAN) | Packaging unit |
|--------------|---------------------|---------------|----------------|
| 17203.8 | SQI 2,5/4 | 4044211148560 | 20 PC |

17180.2

SRKD 2,5 BG

SRKD 2,5 BG

Accessories

Insulated cross connector



Insulated cross-connector, No. of poles: 5, Mounting type: Plug in, Width: 25.2 mm, Rated cross-section: 2.5 mm², Colour: Yellow

In general

| Order number | Article designation | GTIN (EAN) | Packaging unit |
|--------------|---------------------|---------------|----------------|
| 17204.8 | SQI 2,5/5 | 4044211148577 | 20 PC |



Insulated cross-connector, No. of poles: 6, Mounting type: Plug in, Width: 30.3 mm, Rated cross-section: 2.5 mm², Colour: Yellow

In general

| Order number | Article designation | GTIN (EAN) | Packaging unit |
|--------------|---------------------|---------------|----------------|
| 17205.8 | SQI 2,5/6 | 4044211148584 | 20 PC |

17180.2

SRKD 2,5 BG

SRKD 2,5 BG

Accessories

Insulated cross connector



Insulated cross-connector, No. of poles: 7, Mounting type: Plug in, Width: 35.4 mm, Rated cross-section: 2.5 mm², Colour: Yellow

In general

| Order number | Article designation | GTIN (EAN) | Packaging unit |
|--------------|---------------------|---------------|----------------|
| 17206.8 | SQI 2,5/7 | 4044211148591 | 20 PC |



Insulated cross-connector, No. of poles: 8, Mounting type: Plug in, Width: 40.5 mm, Rated cross-section: 2.5 mm², Colour: Yellow

In general

| Order number | Article designation | GTIN (EAN) | Packaging unit |
|--------------|---------------------|---------------|----------------|
| 17207.8 | SQI 2,5/8 | 4044211148607 | 10 PC |

17180.2

SRKD 2,5 BG

SRKD 2,5 BG

Accessories

Insulated cross connector



Insulated cross-connector, No. of poles: 9, Mounting type: Plug in, Width: 45.6 mm, Rated cross-section: 2.5 mm², Colour: Yellow

In general

| Order number | Article designation | GTIN (EAN) | Packaging unit |
|--------------|---------------------|---------------|----------------|
| 17208.8 | SQI 2,5/9 | 4044211148614 | 10 PC |

Screw driver



Screwdriver with bare blade, Colour: Black-grey

In general

| Order number | Article designation | GTIN (EAN) | Packaging unit |
|--------------|---------------------|---------------|----------------|
| 1085.0 | SDB 0,5x3,0 | 4044211014643 | 1 PC |


17180.2

SRKD 2,5 BG

SRKD 2,5 BG

Accessories

Quick-marking



Terminal marker / Pocket Maxicard, Length: 5 mm,
Width: 5 mm, Colour: White

In general

| Order number | Article designation | GTIN (EAN) | Packaging unit |
|--------------|---------------------|---------------|----------------|
| 4600.7 | PMC SB 5/50 WH | 4044211088903 | 500 PC |
