

Part number

CQM 12



Male insert, CQ series, crimp connection, 12 poles + PE, 10 A 400 V 6 kV 3, size "21.21"


Product description		Material properties	
Product type	Insert	Main material	Polycarbonate (PC)
Series	CQ	Other materials	Gasket: NBR
Connection type	Crimp connection	Colour	RAL 7032 grey
Gender	Male		Compliant with exemption
N. of poles	12 poles +	RoHs conformity	6(c): copper alloy containing up to 4% lead by weight
Size	Size "21.21"	China RoHs - EFUP	50
Technical data		SCIP number	1a9c93ff-0445-4a16-81e3-1609ac5274d6
Current	10 A	Approvals / Standards	
Voltage	400 V	Reference standard	EN 61984:2009-06
Rated impulse withstand voltage	6 kV	Certifications	CSA, CQC, DNV, BV, EAC
Pollution degree	3	UL	ECBT2, PVVA2
Rated voltage according to UL/CSA	600 V	cUL	ECBT8, PVVA8
IP degree of protection	IP20 without enclosure, IP66/IP67/IP68/IP69 with enclosure	General ordering information	
Further technical details		EAN13 code	8015747163934
Characteristics according to EN 61984	10A 400V 6kV 3; 10A 400/690V 6kV 2	eCl@ss 8.1	27440205
Mating cycles	≥ 500	ETIM 7.0	EC000438
Insulation resistance	≥ 10 GΩ	Packaging Information	
Contact resistance	≤ 3 mΩ	Packaging length	245,00 mm
Weight	12,65 g	Packaging height	165,00 mm
Operating temperature range (min, max)	-40 °C ... +125 °C	Packaging width	215,00 mm
UL 94 flammability rating	V-0	Packaging weight	2,85 kg
Tightening torque for PE connection	M3: 0,5 Nm; 4,4 lb.in (0,5 x 3 mm)	Packaging volume	8,69 dm ³
Tightening torque for fixing screws	M3: 0,5 Nm; 4,4 lb.in (Ph1 or 0,8 x 5,5 mm)	Packaging description	Carton box
		Packaging quantity	200 Pcs
		Packaging EAN code	8015747208949
		Sub-packaging weight	0,57 kg
		Sub-packaging description	Carton tray
		Sub-packaging quantity	40 Pcs
		Sub-packaging EAN barcode	8015747163965

Part number


CQM 12




Catalogue drawings

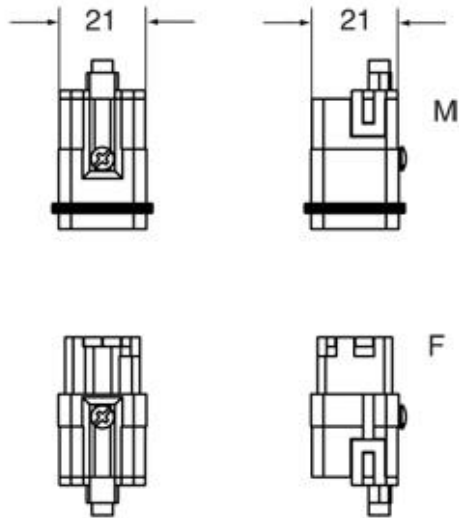

Catalogue drawings

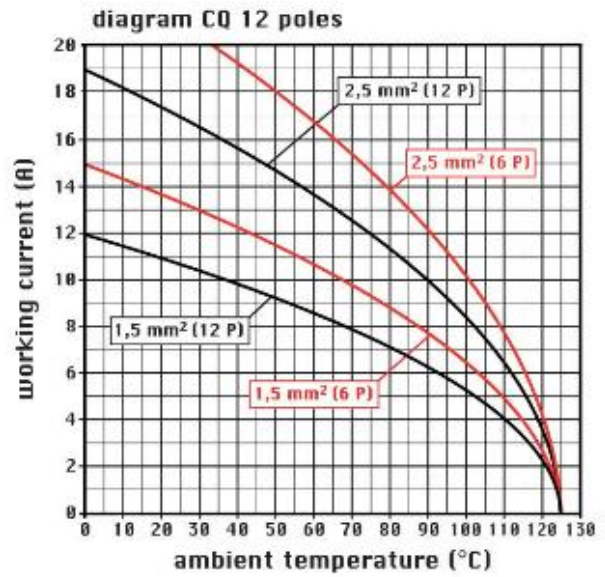

1.

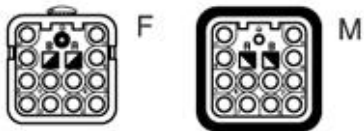

Notes

Dimensions shown in mm are not binding and may be changed without notice.