



# Branch Joints

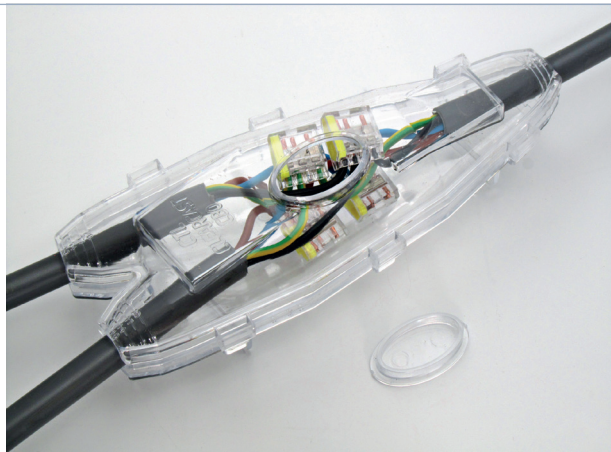

The Filoform range of cast resin Branch Joints are approved in accordance with DIN EN 50393 (VDE 0278:393):2006-11, and are suitable for use with both armoured and unarmoured cables up to and including 1kv. The joints are suitable for use on most cable types, including PILC, XLPE, PVC and EPR, and can be supplied complete with armour earth kit and mechanical connectors as standard.

The standard Branch Joints can be upgraded to suit 3.3kv by using a separate supplementary kit.

Designed for UK armoured cables to allow plenty of room to work.

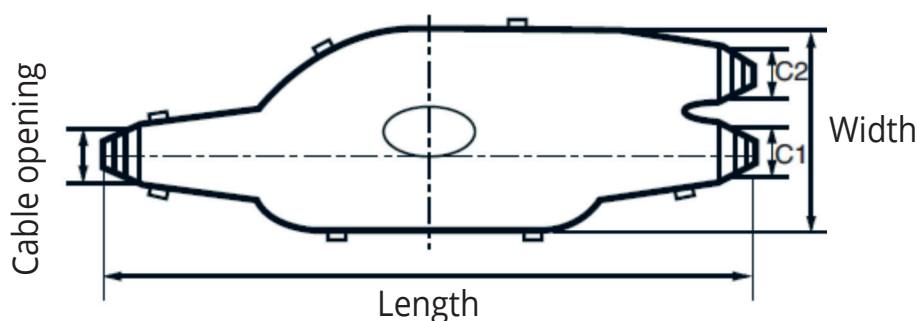

Item number	Description	Cable Diameter (mm)	Dimensions (mm)
MB6	MB6	Ø 10 - 22	220 x 76
MB16	MB16	Ø 10 - 30	282 x 100
MB35	MB35	Ø 15 - 30	360 x 100
MB35	MB35	Ø 15 - 30	360 x 100
MB70	MB70	Ø 15 - 40	390 x 120
MB120	MB120	Ø 15 - 50	570 x 160
MB300	MB300	Ø 45 - 75	740 x 250

## Features

- Type tested according to: EN 50393:2006-11
- Hydrolysis resistant polyurethane resin in a transparent 2 component bag
- Strong transparent shells
- Fully waterproof, no resin leakage
- Cable spacers included
- Complete kit, sealing tape, sandpaper, and protective gloves also included
- Installation instructions with clear drawings
- Quick and easy installation
- Connectors and earthing kits available on request
- Type tested according to: IEC 60455-3-8:2013