



## Main

|                           |                         |
|---------------------------|-------------------------|
| Range of product          | Harmony XAC             |
| Product or component type | Pendant control station |
| Device short name         | XACA                    |

## Complementary

|                                       |  |
|---------------------------------------|--|
| Control station type                  | Double insulated   |
| Enclosure material                    | Polypropylene  |
| Electrical circuit type               | Control circuit  |
| Enclosure type                        | Empty enclosure  |
| Number of cut-out                     | 6 cut-outs   |
| Control station colour                | Yellow   |
| Cable entry                           | Rubber sleeve with stepped entry 8...26 mm                       |
| Guard rail                            | Without  |
| Vertical operator cut-out centre      | 30 mm  |
| Standards                             | EN/IEC 60204-32<br>UL 508<br>CSA C22.2 No 14<br>EN/IEC 60947-5-1 |
| Product certifications                | GOST<br>CCC  |
| Protective treatment                  | TH   |
| Ambient air temperature for operation | -25...70 °C  |
| Ambient air temperature for storage   | -40...70 °C  |
| Vibration resistance                  | 15 gn (f= 10...500 Hz) conforming to IEC 60068-2-6               |
| Shock resistance                      | 100 gn conforming to IEC 60068-2-27                              |
| Overvoltage category                  | Class II conforming to IEC 61140                                 |
| IP degree of protection               | IP65 conforming to IEC 60529                                     |

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

|                         |                             |
|-------------------------|-----------------------------|
| IK degree of protection | IK08 conforming to EN 50102 |
| Mechanical durability   | 1000000 cycles              |
| Net weight              | 0.665 kg                    |

### Packing Units

|                              |          |
|------------------------------|----------|
| Unit Type of Package 1       | PCE      |
| Number of Units in Package 1 | 1        |
| Package 1 Weight             | 743 g    |
| Package 1 Height             | 8.5 cm   |
| Package 1 width              | 9 cm     |
| Package 1 Length             | 57 cm    |
| Unit Type of Package 2       | P06      |
| Number of Units in Package 2 | 40       |
| Package 2 Weight             | 42.72 kg |
| Package 2 Height             | 80 cm    |
| Package 2 width              | 80 cm    |
| Package 2 Length             | 60 cm    |

### Offer Sustainability


|                            |   |
|----------------------------|---|
| Sustainable offer status   | Green Premium product   |
| RECh Regulation            | <a href="#">RECh Declaration</a>  |
| RECh free of SVHC          | Yes   |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope)<br><a href="#">EU RoHS Declaration</a> |
| Toxic heavy metal free     | Yes   |
| Mercury free               | Yes   |
| RoHS exemption information | <a href="#">Yes</a>   |
| China RoHS Regulation      | <a href="#">China RoHS declaration</a>  |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>   |

### Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Dimensions

Below drawing shows a product with 6 cut-outs. Select the number of cut-outs according to the product characteristics in order to get b, b1 and c dimensions.

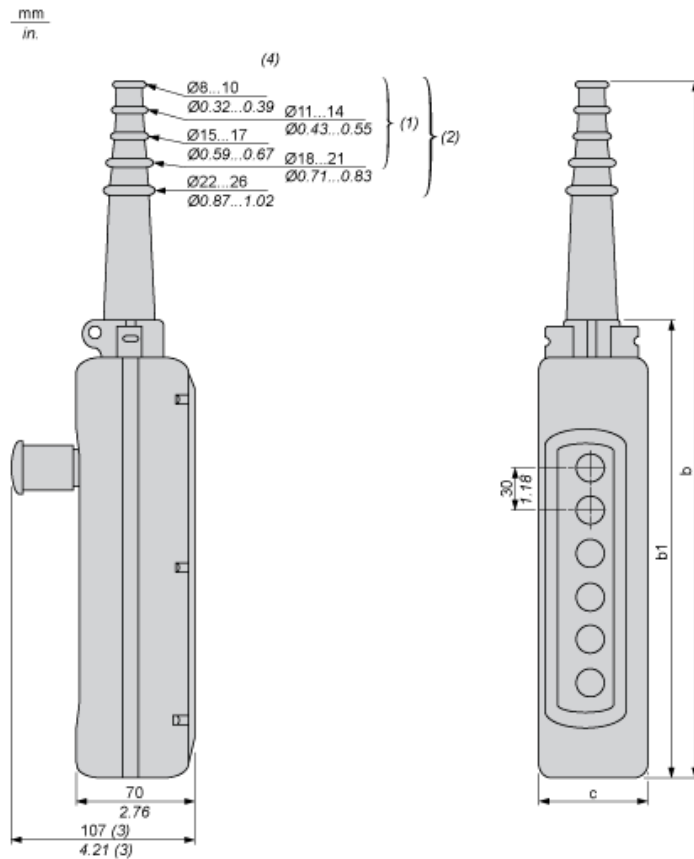

- (1) For 2 and 3-way XAC A stations.
- (2) For 4 to 8-way XAC A stations.
- (3) With trigger action Emergency stop head operator
- (4) Internal  $\varnothing$

Dimensions in mm

| Number of cut-outs | 2   | 3   | 4   | 5   | 6   | 8   | 12  |
|--------------------|-----|-----|-----|-----|-----|-----|-----|
| b                  | 314 | 314 | 440 | 440 | 500 | 560 | 680 |
| b1                 | 190 | 190 | 250 | 250 | 310 | 370 | 490 |
| c                  | 80  | 80  | 80  | 80  | 80  | 80  | 92  |

Dimensions in in.

| Number of cut-outs | 2     | 3     | 4     | 5     | 6     | 8     | 12    |
|--------------------|-------|-------|-------|-------|-------|-------|-------|
| b                  | 12.36 | 12.36 | 17.32 | 17.32 | 19.68 | 22.05 | 26.77 |
| b1                 | 7.48  | 7.48  | 9.84  | 9.84  | 12.20 | 14.57 | 19.29 |
| c                  | 3.15  | 3.15  | 3.15  | 3.15  | 3.15  | 3.15  | 3.62  |