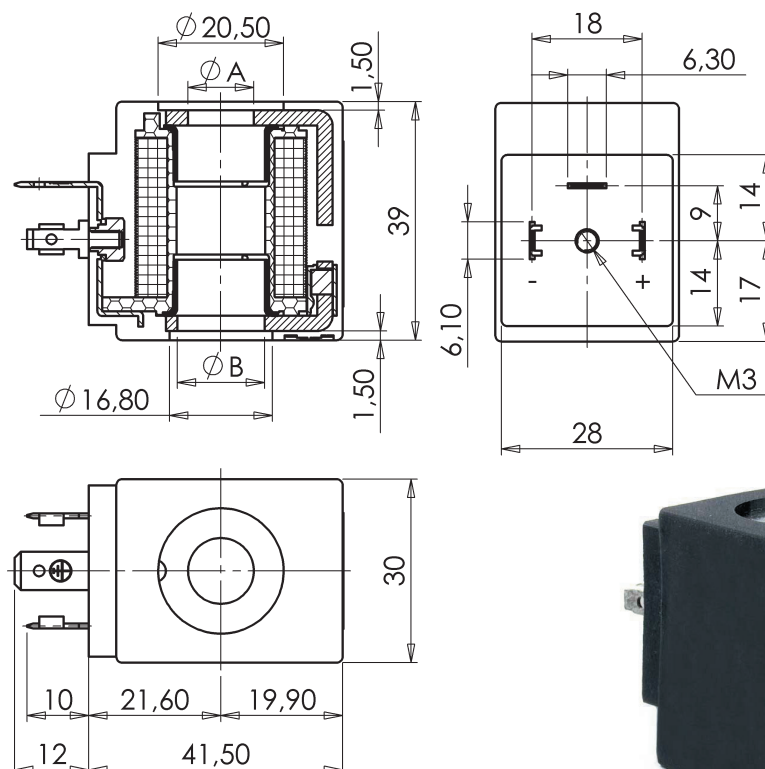


ASCO™ COIL
SPADE TERMINALS (DIN 46340)**General Features**

Complying with 2014/35/EU (LVD) and 2014/30/EU (EMC) directives.

Product in accordance with the RoHS 2 directive.
100% inspected.

Electric Connections

Spade terminals 6,3 x 0,8 (DIN46340), 2 line + 1 earth terminals.
3 poles plug connector (DIN 43650).


Encapsulation Materials

PP-V0 (Self-extinguishing polypropylene); black colour.

Technical Features


Insulation class		A (105°C)
Ambient temperature		-10°C +60°C
Protection degree		IP 65 (EN 60529) with plug connector
Voltages	DC	6-12V (+10% -5%)
		(Other voltages on request)

ENERGIZING
WITH POLARITY



CORE ATTRACTION

ENERGIZING
WITH POLARITY



CORE RELEASE

Type	Power absorption			Holes		Notes	Weight (kg)
	AC (VA)		DC (W)				
	Inrush	Holding		Ø A	Ø B		
ZA70A	-	-	6	10,7	14,2	-	0,14
ZA70C			3				
ZA70F			9				