


ASCO™ SOLENOID VALVE

2/2 NORMALLY CLOSED – DIRECT ACTING - G 1/8

SERIES
L120-NPT

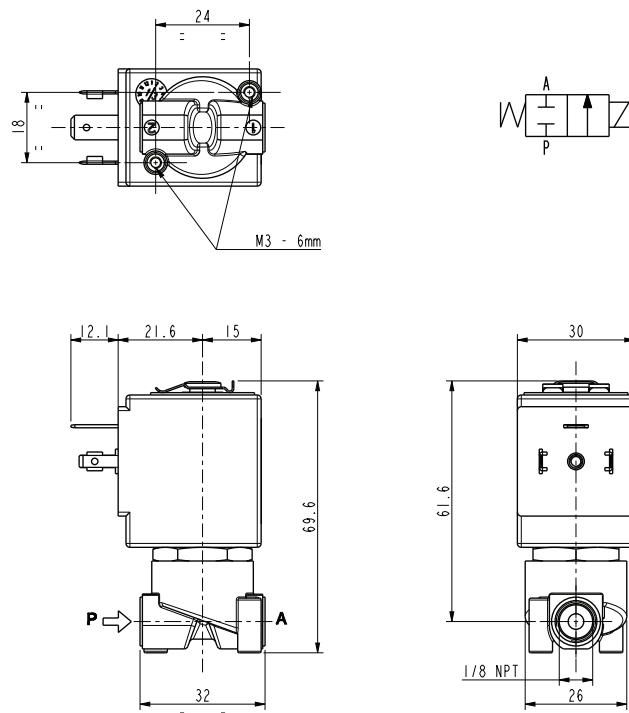

General Features

Direct acting solenoid valve, small body size.

Suitable to shut off liquid and gaseous fluids (verify the compatibility of fluid with material in contact).

Technical Features	
Maximum allowable pressure (PS)	40 bar
Opening time	~20 ms
Closing time	~20 ms
Fluid temperature	0°C +130°C
Max viscosity	5°E (~37 cStokes or mm²/s)

Materials in Contact with Fluid	
Body	Brass
Sealing	FPM
Internal components	Stainless steel
Seat	Brass
Core tube	Stainless steel
Shading coil	Copper

Coil		
Continuous duty	ED 100%	
Encapsulation material	PPS (Polyphenylsulfure) fiberglass reinforced	
Insulation class	F (155°C) on request class H (180°C) – UL (see ZA34)	
Ambient temperature	-10°C +50°C	
Electric connections	DIN 46340 - 3 poles plug-connectors	
Protection degree	IP67 (EN 60529) with plug-connector (EN175301-803)	
Voltages	DC	12-24V (+10% -5%)
	AC	24V/50Hz - 110V/50Hz (120V/60Hz) - 230V/50Hz (+10% -15%) (Other voltages and frequencies on request)

Port size (ins)	Orifice size (mm)	Differential pressure (bar)						Kv (m³/h)	Series and type		Power absorption			Sealings	Notes	Weight (kg)
		Δp min	Δp max													
			Gases			Liquids										
			AC	DC	AC	DC	AC		DC							
1/8 NPT	1,6	0	30	30	30	30	0,09	L120V06	ZA10A	23	14	9	FPM	-	0,260	
	2,3		20	16	20	16	0,15									


Notes

- Sealings: FPM=Fluoro-carbon elastomer
- IMQ CSV approval, see ZA10 datasheet for further details

SERIES
L120-NPT

ASCO™ SOLENOID VALVE
2/2 NORMALLY CLOSED – DIRECT ACTING - G 1/8

Spare Parts

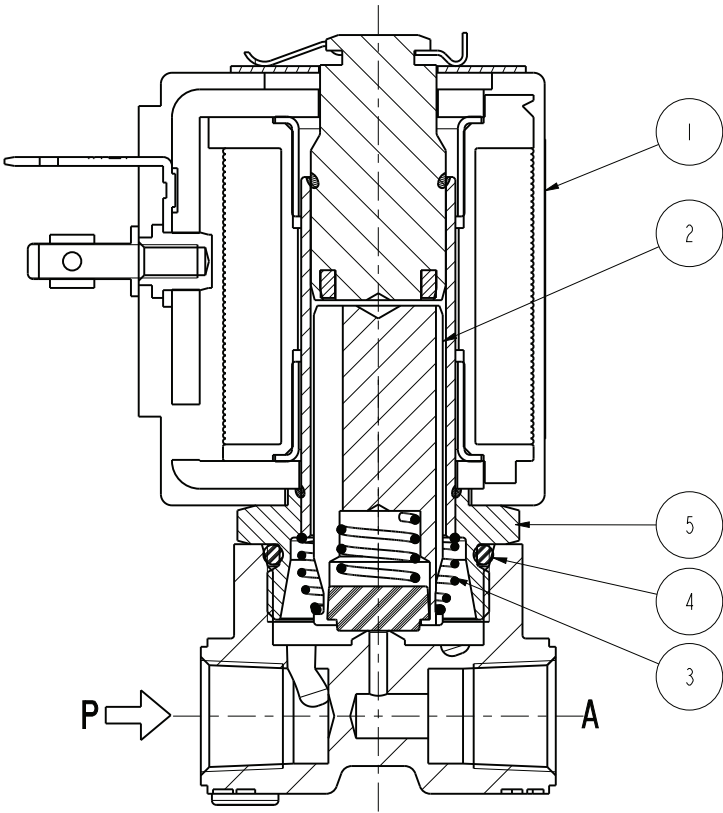

Kit description	Kit P.N.	Consisting of:
Core kit	G3022803	Core (with core return spring) pos. 2 OR guide assembly pos.4
Core return spring kit	G3022401	N.10 core return spring pos.3
OR guide assembly kit	GU2424000017	N.10 OR guide assembly pos.4
Guide assembly kit	G31486	Guide assembly pos.5 Coil clip
Coil	ZA10A	Coil pos.1

Installation

- Solenoid valve can be mounted in any position; vertical with coil upwards preferred.

THE VALIDITY OF REPORTED DATA IS REFERRED TO THE DATE OF ISSUE. POSSIBLE UPDATES ARE AVAILABLE ON REQUEST