



## Slotted Panel Trunking T1-ZH

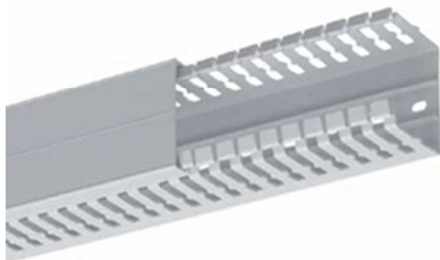


Material: PC-ABS halogen-free  
 Color: grey (RAL 7035)  
 Delivery Length: 2 m  
 Dimensions: 18

- temperature-resistant - 25°C to + 90°C
- certified for application within rolling stocks according to EN 45545-2
- certified according to EN 50085-2-3
- web distance 12,5 mm / slot 6 mm / web 6.5 mm
- line occupancy until 6 mm<sup>2</sup>
- base holes according to EN 50085
- self-extinguishing according to UL94 V0
- UL listed File-Nr.: E66583
- CSA listed File-Nr.: 269477

W x H	Order Code	Covers Order Code
25x25	B12563	B01219
25x40	B12565	B01211
40x40	B12566	B01212
60x40	B12567	B01213
25x60	B12572	B01211
40x60	B12573	B01212
60x60	B12574	B01213
80x60	B12575	B01214
100x60	B12576	B01215
40x80	B12581	B01212
60x80	B12582	B01213
80x80	B12583	B01214
100x80	B12584	B01215
120x80	B12585	B01216
40x100	B12589	B01212
60x100	B12590	B01213
80x100	B12591	B01214
100x100	B12592	B01215



Base Punching  
Width 25/40/60




Base Punching  
Width 80/100/120




Side Stamping Height 25mm




Side Stamping Height 40mm



Side Stamping Height 60mm



Side Stamping Height 80mm



Side Stamping Height 100mm