


Vision is
our mission®

Adapter Cable 4pF 4pF
Article no. 0304000
2017 • DS0960280 EN A 01

Product Data


Dimensions

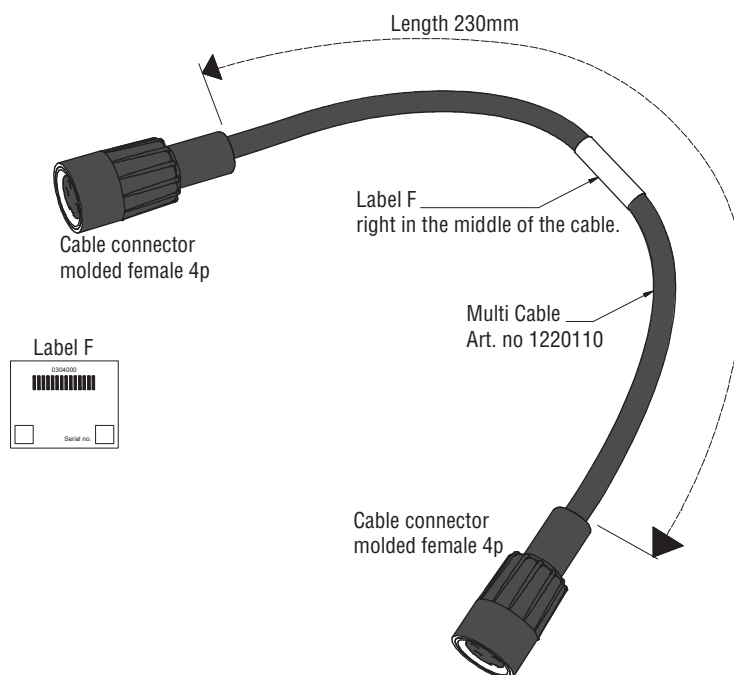

TECHNICAL DATA

Adapter Cable 4pF 4pF

	Description
Article number	0304000
Weight	0,08kg.
Coax	Coax Cable 26AWG 19 x 0,10 mm, Core: CU-ETP1 according DIN EN 13602. Shield tinned copper braided $\geq 85\%$. Sheath PP.
C1 to C3 Conductor	3 x AWG22, 7 x 0,25mm, tinned copper. Color: Black, Red, Orange.
Jacket	TPE-U Sh A 85 +/-5; Halogen Free, overall diameter 6mm +0,0/-0,2mm, Color: Black RAL 9005.
Shield	Tinned copper, braided $\geq 85\%$.
Temperature range	-40°...+85°C.
Min. bending radius	7,5 x Diameter (Static).
Coax impedance	75 Ω
Approvals	Chemical Resistance: Oil, Mud. Fire resist: IEC 60332-3. Halogen free: DIN VDE 0472 part 815.



Front side molded female connector

Electrical connection

Soldering of Connectors (Multicable 1220110)

1 = Coax core	= Video
2 = Coax shielding	= Video GND
3 = Red	= Power
4 = Black	= 0V
Orange	= N.C.

All data subject to change without notice. All dimensions are for commercial purpose only.

The camera/display systems from Orlaco comply with the latest CE, ADR, EMC and mirror-directive regulations, where applicable.

All products are manufactured in accordance with the ISO 9001 quality management system, ISO/TS 16949 quality automotive, ISO 14001 environmental management systems and all Ex products with the IECEx scheme and ATEX directives, where applicable.

