

# Product datasheet

Specifications



## Auxiliary contact block, TeSys Deca, 1NO+1NC, front mounting, for GV2

GVAE11

### Main

<b>Range</b>	TeSys TeSys Deca
<b>Device short name</b>	GVAE
<b>Product or component type</b>	Auxiliary contact block
<b>Product compatibility</b>	GV2P GV2RT GV2ME GV3L GV2LE GV3P GV2L
<b>Mounting location</b>	Front side
<b>Pole contact composition</b>	1 NO + 1 NC
<b>Quantity per set</b>	Set of 10

### Complementary

<b>[Ui] rated insulation voltage</b>	300 V conforming to UL 508 300 V conforming to CSA C22.2 No 14 250 V conforming to IEC 60947-1
<b>[Ue] rated operational voltage</b>	24...240 V AC 24...60 V DC
<b>[Ith] conventional free air thermal current</b>	2.5 A
<b>Mechanical durability</b>	100000 cycles
<b>Minimum switching current</b>	5 mA
<b>Minimum switching voltage</b>	17 V
<b>Protection type</b>	GG fuse 10 A GB2CB06 circuit breaker 10 A
<b>Rated operational power in VA</b>	120 VA at 110...120 V AC-15 - electrical durability: 100000 cycles 120 VA at 230...240 V AC-15 - electrical durability: 100000 cycles 48 VA at 24 V AC-15 - electrical durability: 100000 cycles 60 VA at 48 V AC-15 - electrical durability: 100000 cycles
<b>Rated operational power in W</b>	15 W at 48 V DC-13 - electrical durability: 100000 cycles 24 W at 24 V DC-13 - electrical durability: 100000 cycles 9 W at 60 V DC-13 - electrical durability: 100000 cycles
<b>Tightening torque</b>	1.4 N.m - on screw clamp terminals
<b>Height</b>	11 mm
<b>Width</b>	45 mm
<b>Depth</b>	29 mm
<b>Net weight</b>	0.02 kg

## Environment

Environmental characteristic	Normal environment
Product certifications	UKCA

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	1.200 cm
Package 1 Width	6.000 cm
Package 1 Length	7.000 cm
Package 1 Weight	17.000 g
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Height	6.200 cm
Package 2 Width	12.000 cm
Package 2 Length	7.400 cm
Package 2 Weight	174.000 g
Unit Type of Package 3	S02
Number of Units in Package 3	220
Package 3 Height	15.000 cm
Package 3 Width	30.000 cm
Package 3 Length	40.000 cm
Package 3 Weight	4.123 kg

## Logistical informations

Country of origin	CZ
-------------------	----

## Contractual warranty

Warranty	18 months
----------	-----------



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Environmental footprint

Total lifecycle Carbon footprint	1
----------------------------------	---

## Use Better

### Materials and Substances

Packaging made with recycled cardboard	Yes
--	-----

Packaging without single use plastic	No
--------------------------------------	----

<a href="#">EU RoHS Directive</a>	Compliant
-----------------------------------	-----------

REACH Regulation	<a href="#">REACH Declaration</a>
------------------	-----------------------------------

## Use Again

### Repack and remanufacture

End of life manual availability	<a href="#">End of Life Information</a>
---------------------------------	---

Take-back	No
-----------	----

WEEE Label	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
------------	---

## Connections and Schema

---

GVAE11

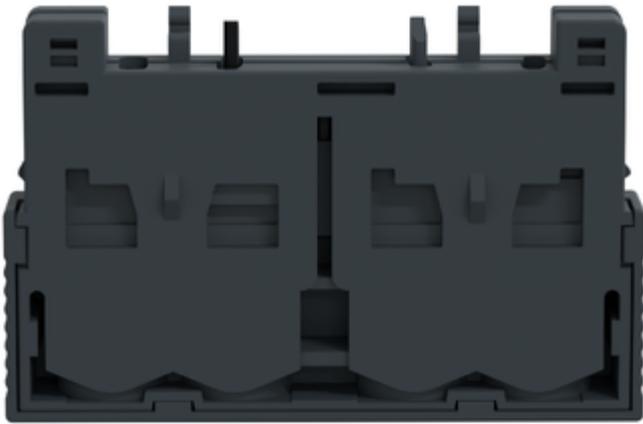


Image of product / Alternate images

Alternative

---





Technical Illustration

## Assembly's dimensions

---

