



SUCO - 0570 ELECTRONIC PRESSURE SWITCH/SENSOR

Dual output with display

0570467141001
4-20mA, 2xPNP, 0..10 bar, G1/4 female, NBR, DIN

- Programmable using keypad
- Three adjustment ranges from 0..10 bar to 0..400 bar
- 2 PNP + 4-20 mA output
- LED Display



Product description


The SUCO 0570 is a menu controlled electronic pressure switch with a built in 4-20mA output and simple to program through the touch keypad. There are two switch points available and either can be programmed to normally open or normally closed along with switching time delay, zero point reset, peak value memory and switch point counter. The current pressure is displayed on the LED display and both switch points have an active indication light.

Common applications include factory monitoring, air systems, hydraulics and more.

Specifications

Accuracy	±0.5% FS
Adjustment range max	10
Adjustment range min	0
Approvals	CE, RoHS II
Burst Pressure	25
Display	Yes
Electrical connection	GO 51 FAV M
Hysteresis	1-99% FS
IP Class	IP65
Lifespan Mechanical	5 million cycles
Material of body	Anodised aluminum
Materials Wetted Parts	Anodised aluminum, Ceramic, NBR
Max. pressure	20

Measuring Principle	Ceramic cell in thick-film technology
Membrane Material	NBR
Output	2 x PNP + 4-20mA
Pressure Range Max	10
Pressure Range Min	0
Pressure reference	Gauge
Pressure type	Relativt tryck
Process connection	G1/4 female
Shock Resistance	294m / s ² ; 11 ms half sinusoidal wave; DIN EN 60068-2-27
Supply Voltage DC Max	30
Supply Voltage DC Min	12
Temperature ambient from	-20
Temperature ambient to	80
Temperature range of media from	-20
Temperature range of media to	80
Type Pressure Switch	Electronic
Weight	340

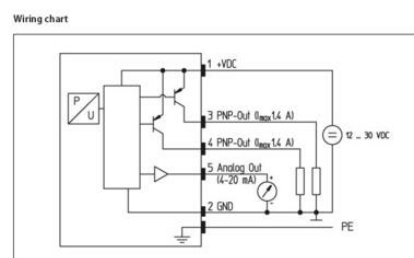

Wiring chart

