


MINIATURE TERMINALS TS15/32/35 - RK 1.5-4, SRK 2.5

RK1.5-4, SRK 2.5

1010.2

Terminal Block Mini RK 1.5-4sq Beige (TS15)

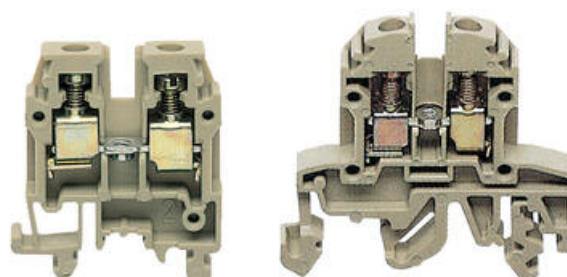

- Compact - ideal for small enclosures
- TS15/TS32 & TS35 range
- up to 4mm² cables
- cross connectable
- Polymide 6.6-V2

Product description

This mixed range of compact terminals is ideal for applications where space is at a premium. The SRK2.5/15 range is the most compact, sitting only 29.5mm high when mounted on TS15 rail. Alternatively, if you do not want din rail mounted terminals, the BKA rang are also compact, but can be mounted directly in the enclosure or back plate.

Specifications

Approvals	UL, CSA, GL, KEMA KUR, EAC
Color	Beige
Connections	2
Contamination degree	3
Country of origin	CZ
Cross connect channels	1
Cross section single wire from	0.2
Cross section single wire to	4
Cross section stranded wire from	0.2
Cross section stranded wire to	4
Cross section stranded with ferrule from	0.2
Cross section stranded with ferrule to	4
Cross-Section	4
CSA test standard	C22.2 No 158
EAC test standard	TR ZU 004/2011
Flamklass	UL94-V2
GL test standard	IEC 60947-7-1:2002

Height TS 15/5.5	34.5
Insulation Material	Polyamide 6.6
KEMA KEUR test standard	EN 60947-7-1:2009
Length	27
Mounting	TS 15
Number of levels	1
Number of test pick off options	2
Operating temperature from	-40
Operating temperature to	105
Overvoltage category	III
Pack Size	100
Plug gauge acc. EN 60 947-1	A4
Rated Current CSA	40
Rated Current IEC	32
Rated impulse voltage	6
Rated wire cross section from (AWG)	22
Rated wire cross section to (AWG)	10
Rated Voltage IEC	500
Screw size	M 3
Screw type	Slotted
Stripping Length	9
Tariff code	85369010
Torque max	1
Torque Min	0.5
UL test standard	UL 1059
Weight	5.64
Width	6
Voltage CSA	300

