

DATALOGIC - VISION SENSOR DATAVS2 AOR

DATAVS2-06DEAOR

Vision Sensor, 6mm lens, ADV Object recognition, Red LED



- 360° pattern recognition
- 8 different controls
- Memory for up to 20 different inspections
- 4 outputs

PRODUCT DESCRIPTION

DataVS2 is a series of Vision sensors for flexible solutions for machine applications.

The sensor is complete with optics, red LED lighting and electronics in a compact housing. The parameters in the sensor are set via PC through Ethernet communication. The software comes with the sensor and is developed to lead the user step by step through parameter setting. DataVS2 is available in three different versions with different control instruments.

Advanced Object recognition AOR - Has a control instrument for 360° pattern recognition.

.Logic functions for that are connected between different control instruments and outputs such as: AND, OR, NOT, NAND, NOR etc.



TECHNICAL DATA



Supply voltage	24 V DC \pm 10 %
Ripple	1Vpp max. with lighting 2Vpp without lighting
Current consumption	100 mA at 24 VDC (without lighting)
Output type	4 PNP
Output current	100 mA max.
Resolution	640x480 (VGA)
Network interface	M12 4-pole Ethernet 10/100 Mbps
Interface external lighting	Strobe signal (24 V PNP N.O)
Frame rate	60 fps
optics	integrated (6 mm/8 mm/12 mm/16 mm)

Indication	4 LED
Connection	M12 8-pole A-coded M12 4-pole D-coded
IP-class	IP50
Encapsulation material	Aluminium alloy/ABS
Weight	125 g
Working temperature	-10 to +50 °C
Storage temperature	-25 to +70 °C

CONTROL INSTRUMENTS




Control	Function	Applications	Image
Pattern Match	Search for a sample within a specified range	<ul style="list-style-type: none"> • Packaging: check of logo • Installation: product-orientation • Automation of post: stamp control 	
Contour Match	Control of form	<ul style="list-style-type: none"> • Metal working: integrity check • Foodstuffs: control of form 	
Position	Control of limit position of the object	<ul style="list-style-type: none"> • Bottling: level control • Foodstuffs: control of label position 	
Width	Measures the object's width	<ul style="list-style-type: none"> • Installation: control of plastic parts • Woodworking industry: measurement of branch thickness 	
Counting	Counts number of objects along a line	<ul style="list-style-type: none"> • Electronics: counting components • Pharmaceutical industry: Counting units 	

Contrast	Calculation of contrast	<ul style="list-style-type: none"> • Foodstuffs: checking presence of date and consignment label • Metal working: Check of laser marking 	
Brightness	Calculation of luminance	<ul style="list-style-type: none"> • Bottling: checking presence of cap • Packaging: counting objects 	

READ FIELD

Read field

Working distance (mm)	Read field (Width x Height) in mm			
	DATAVS2-16-DE-xxx	DATAVS2-12-DE-xxx	DATAVS2-08-DE-xxx	DATAVS2-06-DE-xxx
50	-	17 x 12	25 x 20	42 x 30
80	-	25 x 20	40 x 30	60 x 41
110	-	33 x 25	55 x 40	80 x 55
140	31 x 24	45 x 35	70 x 50	98 x 69
170	39 x 29	53 x 38	85 x 60	118 x 83
200	46 x 34	60 x 50	100 x 70	138 x 92
300	70 x 53	90 x 65	145 x 103	201 x 140
400	94 x 71	121 x 82	186 x 132	265 x 189
500	118 x 89	150 x 110	236 x 167	330 x 232
600	143 x 107	185 x 130	282 x 232	385 x 270

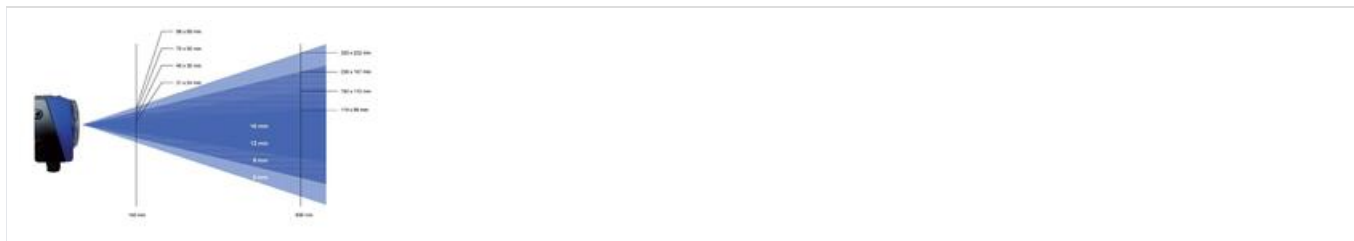

DIMENSIONS

