

HONSBERG - RVM SERIES FLOW SWITCH

Piston

RVM-008GM013
Flow SW. 0.04-0.13 l/min G1/4"

- Switching Range 0,04..3 l/m H₂O
- Water (gas and aggressive media available on request)
- G1/4"
- Brass or Stainless Steel Wetted Parts
- Max Pressure 300 bar






PRODUCT DESCRIPTION




Mechanical flow switch, for fluid media, with magnetic triggering of a reed switch. Robust construction in brass or stainless steel.

SPECIFICATIONS

Accuracy	± 10%
Connection	1/4 "
Contact Rating Max	20
Electrical Connection	Plug connector DIN 43650-C
Flow Max l/min Double	0.17
Flow Range Max	0.13
Flow Range Min	0.04
Function	Flask, reed contact, ending
Hysteresis	min 1 ml / min, depending on breaking value
IP Class	IP65
Pressure drop	0.02-0.2 bar at maximum flow
Pressure Range Max	300
Temperature range of media to	100
Weight	0.14
Viscosity	1
Voltage AC max	200

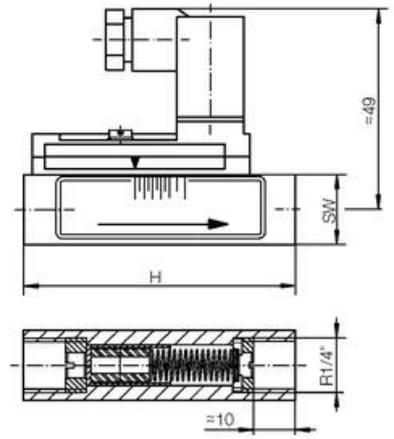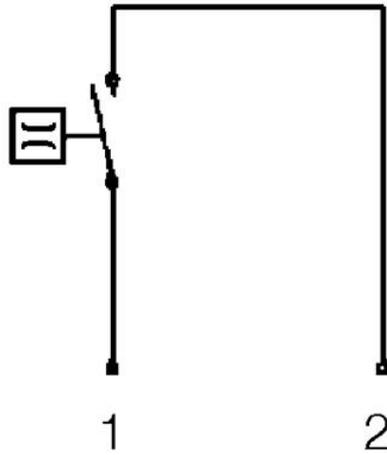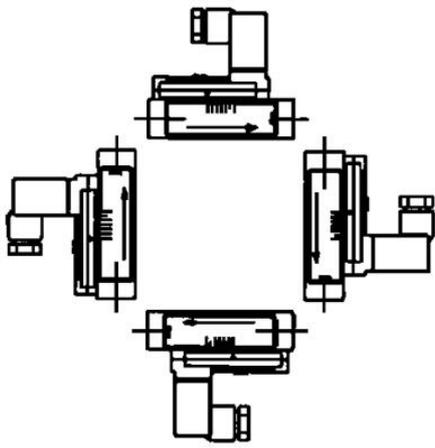

G"	Type	H mm	L mm	SW mm	Weight kg
1/4	RVM-008GM	65	49	17	0,14
1/4	RVM-008GK	65	49	18	0,15

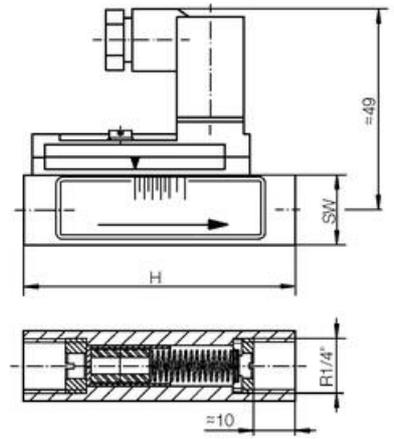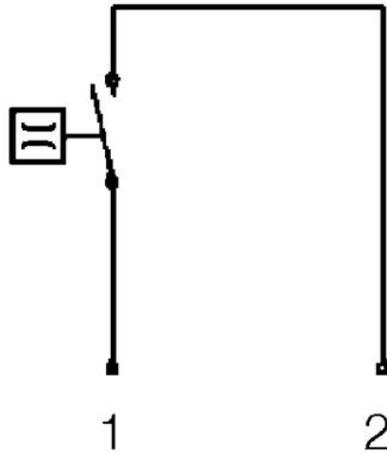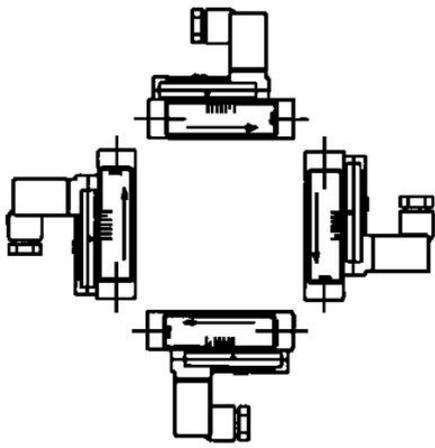

G"	Type	H mm	L mm	SW mm	Weight kg
1/4	RVM-008GM	65	49	17	0,14
1/4	RVM-008GK	65	49	18	0,15