



IDEM TONGUE INTERLOCK SAFETY SWITCHES KM

KM

203001A
KM M20 '2NC 1NO' - std actuator

- Robust die cast housing
- Slim fitting designed for where impact resistance is required
- Available with die cast or stainless steel head
- 8 Actuator entry positions- rotatable head
- IP67 ingress protection rating



Product description

Features

IDEM KM Interlock switches are designed to provide position interlock detection for medium to heavy duty moving guards

They have robust die-cast housings and are designed to fit to the leading edge of sliding, hinged or lift off machine guards. They provide a forced disconnect of the safety contacts at the withdrawal of the actuator and have an anti-tamper mechanism

The rotatable heads have dual actuator entry positions to give up to 8 different entry positions. For extra durability, Flexible Actuators and Stainless Steel head versions are available






Contact blocks are replaceable with optional explosion proof versions. High holding force versions are available for applications where vibration can be a nuisance


Functional specifications

- Positive Break Contacts to EN60947-5-1
- High Functional Safety to ISO13849-1
- 3 pole, 4 pole or Explosion Proof Contact Blocks
- Stainless Steel Head version available
- Connects to most Safety Relays to give up to PLe Cat.4
- Industry Standard Fitting: 40mm wide 118mm long 30mm fixing

Specifications



Actuator	Standard
Annual usage	8 cycles per hour/24 hours per day/365 days
Approvals	ISO 14119, EN60947-5-1, EN60204-1, ISO 13849-1, EN62061, UL 508
Atex approved	No
Conduit entry	M20
Contacts	2NC 1NO
IP Class	IP67
Maximum approach / withdrawal speed	600
Mechanical reliability B10d	2.5×10^6 operations at 100mA load
Mounting	4 x M5
MTTFd	356 years
Operating temperature	-25..80°C
PFHd	3.44×10^{-8}
PL	e acc. ISO13849-1
Rated insulation voltage	500V ac
SIL	3 acc. EN62061
Thermal current (Ith)	5
Travel for positive opening	8
Withstand voltage	2500V ac

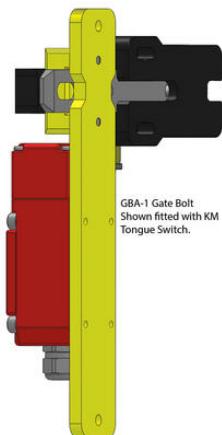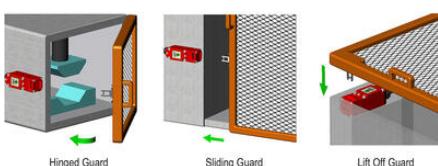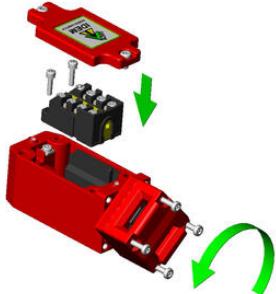


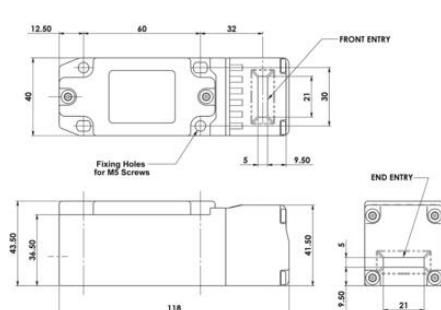

2NC 1NO 3NC 3NC 1NO 2NC 2NO 4NC

33 34 31 32 43 44 43 44 41 42
 21 22 21 22 31 32 33 34 31 32
 11 12 11 12 31 32 33 34 31 32
 11 12 11 12 31 32 33 34 31 32
 11 12 11 12 31 32 33 34 31 32

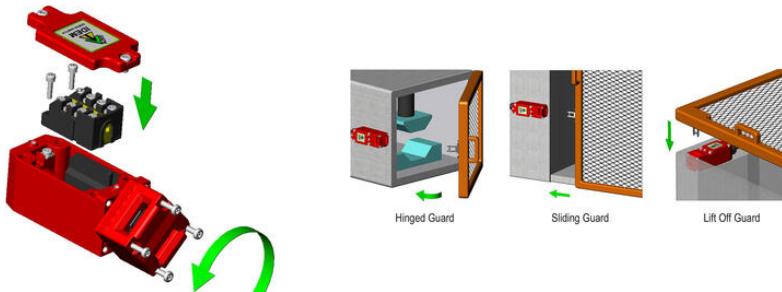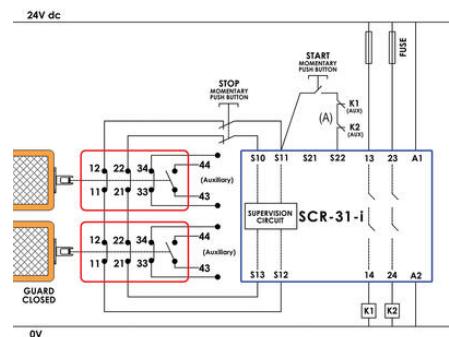

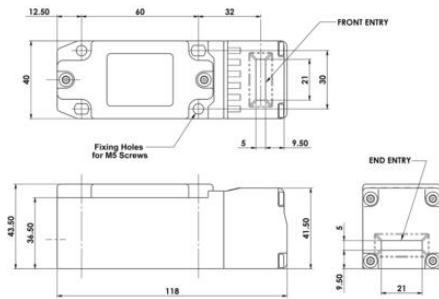

2NC 1NO 3NC 3NC 1NO 2NC 2NO 4NC

